RNAV (GPS) RWY 34

MOREHOUSE MEML (BQP)


WAAS CH 90308 W34A	APP CRS 341°	Rwy Ldg 4002 / TDZE 168 / Apt Elev 168

RNP APCH-GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using MLU altimeter setting. When local altimeter setting not received, use MLU altimeter setting and increase LPV DA to 559 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 602 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and visibility Cat C ¼ SM.


MISSED APPROACH: Climb to 1800 direct FAREX and hold.

AWOS-3PT	MONROE APP CON ★	UNICOM
118.375	126.9 307.9	122.8 (CTAF) L

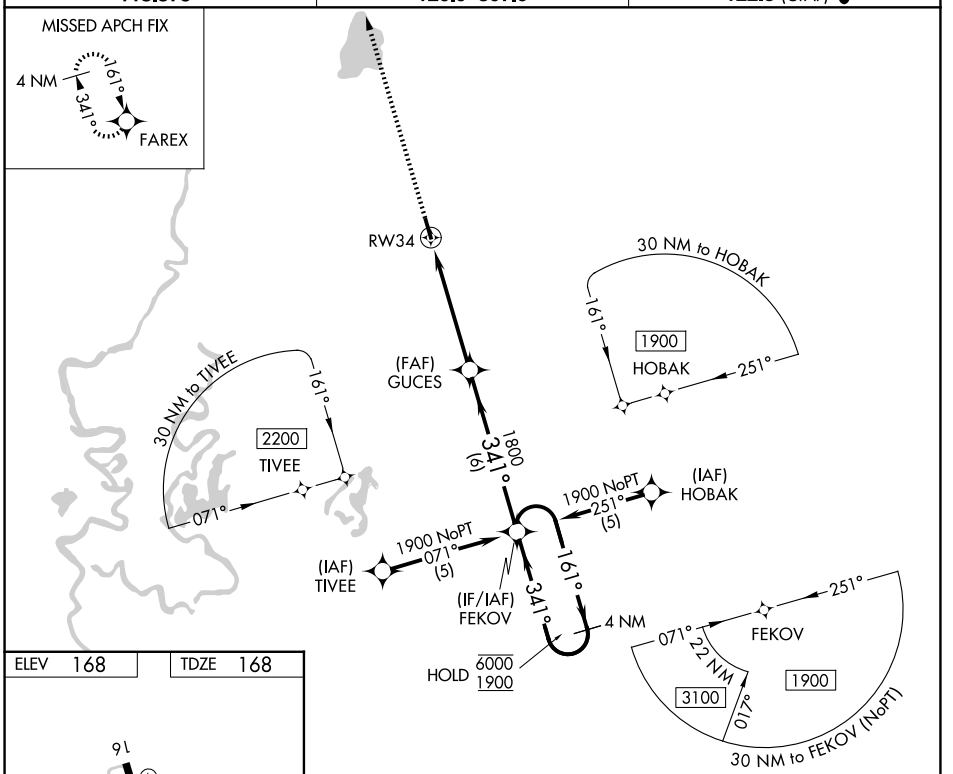

ELEV 168 TDZE 168

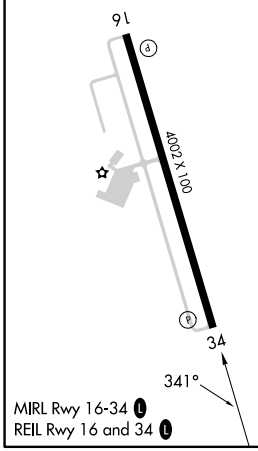

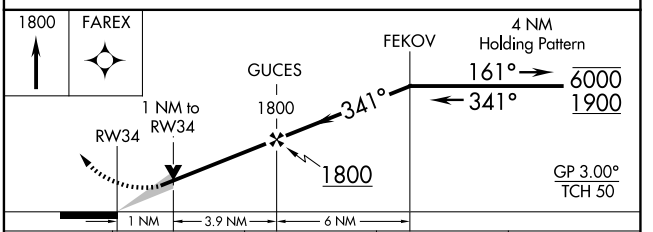

CATEGORY	A	B	C	D
LPV DA	508-1 340 (400-1)			NA
LNAV/VNAV DA	540-1⅛ 372 (400-1⅛)			NA
LNAV MDA	540-1 372 (400-1)			NA
CIRCLING	720-1 552 (600-1)	780-1 612 (700-1)	820-1¾ 652 (700-1¾)	NA

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026