
LOC/DME I-OTI	APP CRS	Rwy Ldg 2999
108.5	219°	TDZE 172
Chan 22		Apt Elev 172


LOC RWY 22
NEWPORT STATE (UUU)

T NA — When local altimeter setting not received, use PVD altimeter setting and increase all MDAs 60 feet and S-LOC 22 and DAAME fix minimums S-LOC 22 visibility Cat C 1⅛ SM. Straight-in Rwy 22 NA at night, Circling Rwy 4, 22, 34 NA at night.


MISSED APPROACH: Climbing left turn to 2100 via PVD VOR/DME R-165 to NICOD INT/21.5 DME and hold.

ASOS	PROVIDENCE APP CON ★	CLNC DEL	UNICOM
132.075	128.7 269.525	127.25	123.05 (CTAF) L

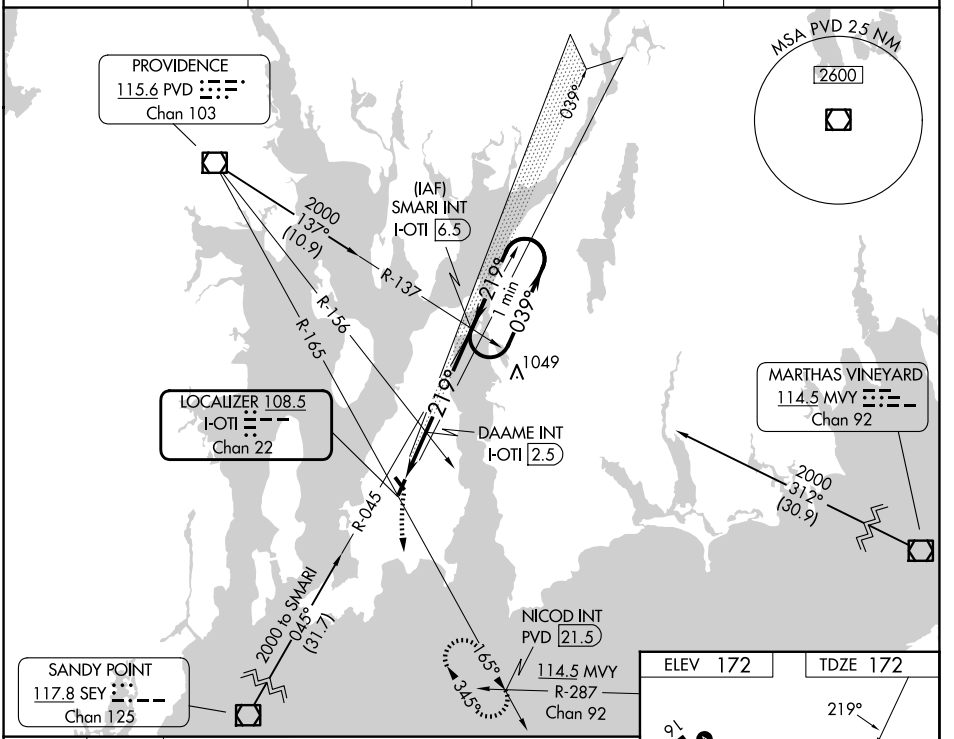

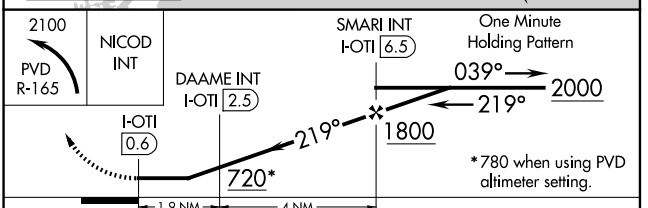

CATEGORY	A	B	C	D
S-22	720-1	548 (600-1)	720-1⅝ 548 (600-1⅝)	NA
CIRCLING	760-1	588 (600-1)	780-1¾ 608 (700-1¾)	NA
DAAME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-22	640-1	468 (500-1)	640-1⅜ 468 (500-1⅜)	NA
CIRCLING	760-1	588 (600-1)	780-1¾ 608 (700-1¾)	NA



REIL Rwy 22 L
MIRL Rwys 4-22 and 16-34 L

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

NE-1, 26 NOV 2026 to 24 DEC 2026