# RNAV (GPS) RWY 28R

## NORTH PERRY (HWO)

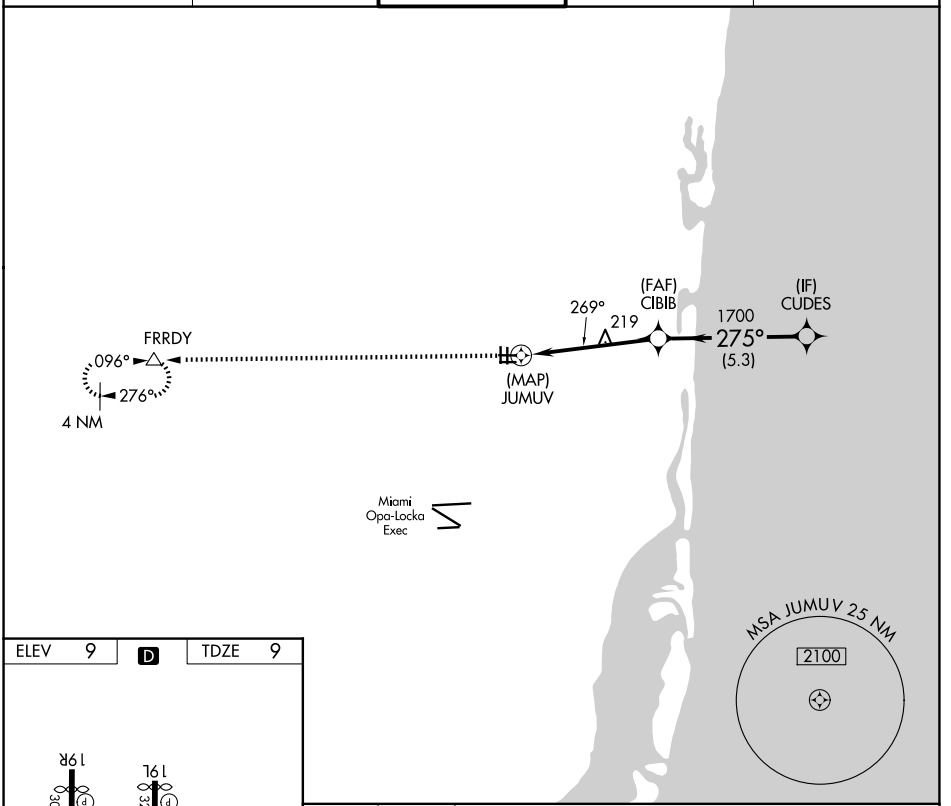
| APP CRS | Rwy Ldg | 3180 |
|---|---|---|
| 269° | TDZE | 9 |
| | Apt Elev | 9 |

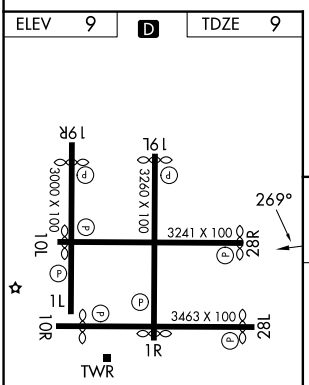
RNP APCH. RADAR required for procedure entry.

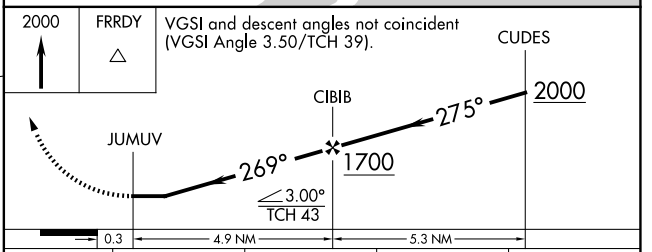
Rwy 28R helicopter visibility reduction below ¾ SM NA. Straight-in minimums NA at night. Circling Rwy 1R, 10L, 19L, 28R NA at night. Circling NA for Cat C south of Rwy 10R-28L.

MISSED APPROACH: Climb to 2000 direct FRRDY and hold.

| ATIS | MIAMI APP CON | NORTH PERRY TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 135.475 | 128.6 306.975 | 132.1 (CTAF) L 254.3 | 120.45 254.3 | 122.95 |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA | 520-1 | 511 (600-1) | 520-1⅜ 511 (600-1⅜) | NA |
| CIRCLING | 560-1 | 551 (600-1) | 560-1½ 551 (600-1½) | NA |

REIL Rwys 1L, 10R, 19R and 28L
MIRL Rwys 10R-28L and 1L-19R L



SE-3, 26 NOV 2026 to 24 DEC 2026
SE-3, 26 NOV 2026 to 24 DEC 2026