WAAS CH 56631 W33A	APP CRS 330°	Rwy Ldg 5401 TDZE 1011 Apt Elev 1011

RNAV (GPS) RWY 33

NEW ULM MUNI (ULM)


RNP APCH.

Circling NA to Rwys 4 and 22. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM, LNAV Cat D to 1⅛ SM.


MALSF

MISSED APPROACH: Climb to 3000 direct KADPE and hold.


AWOS-3	MINNEAPOLIS CENTER	GCO	UNICOM
118.325	127.1 290.2	121.725	123.0 (CTAF) L

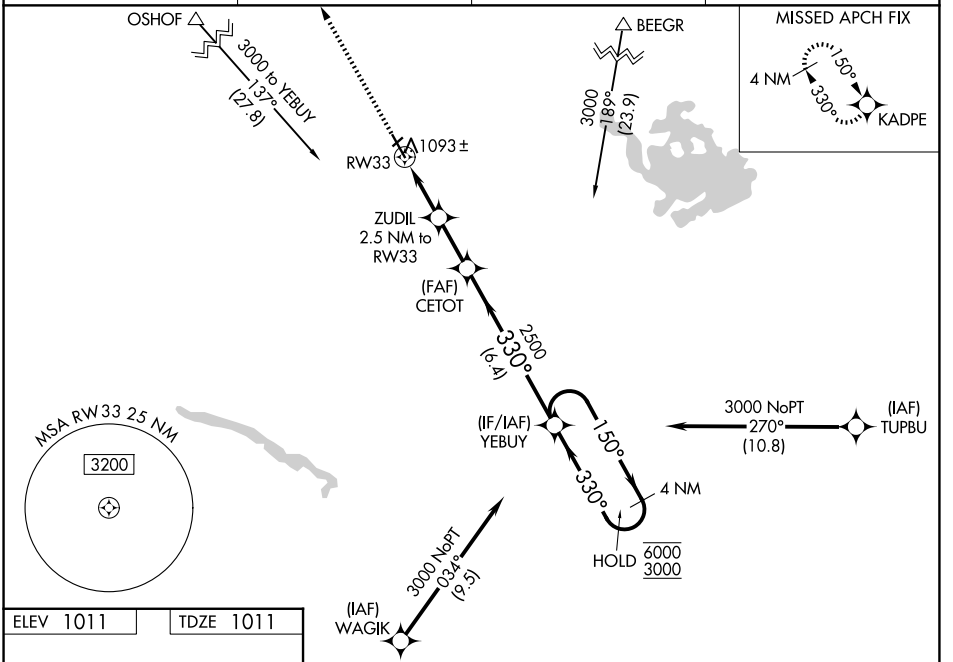

ELEV 1011	TDZE 1011

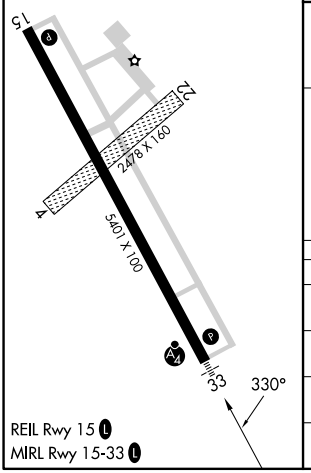

REIL Rwy 15 L
MIRL Rwy 15-33 L

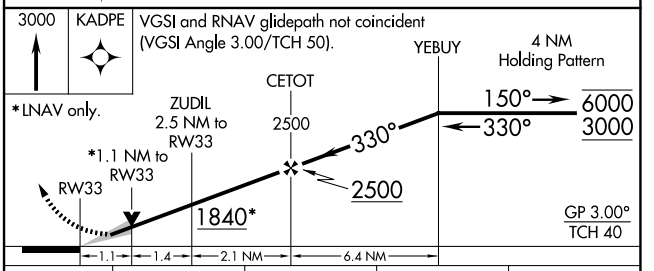

CATEGORY	A	B	C	D
LPV DA	1211-¾ 200 (200-¾)			
LNAV/VNAV DA	1312-¾ 301 (400-¾)			
LNAV MDA	1400-¾ 389 (400-¾)		1400-⅞ 389 (400-⅞)	
CIRCLING	1440-1 429 (500-1)	1500-1 489 (500-1)	1620-1¾ 609 (700-1¾)	1620-2 609 (700-2)

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026