RNAV (GPS) RWY 36

GEORGE M BRYAN (STF)


WAAS	APP CRS	Rwy Ldg	5550
CH 53604	360°	TDZE	326
W36A		Apt Elev	333


RNP APCH-GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C . When local altimeter setting not received, use Golden Triangle Rgnl altimeter setting and increase LPV DA to 566 feet; increase LNAV/VNAV DA to 690 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D 1⅛ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Golden Triangle Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct FESBO and hold, continue climb-in-hold to 3400.

AWOS-3PT	COLUMBUS APP CON ★	CLNC DEL	UNICOM
118.975	135.6 323.275	126.25	122.7 (CTAF) L

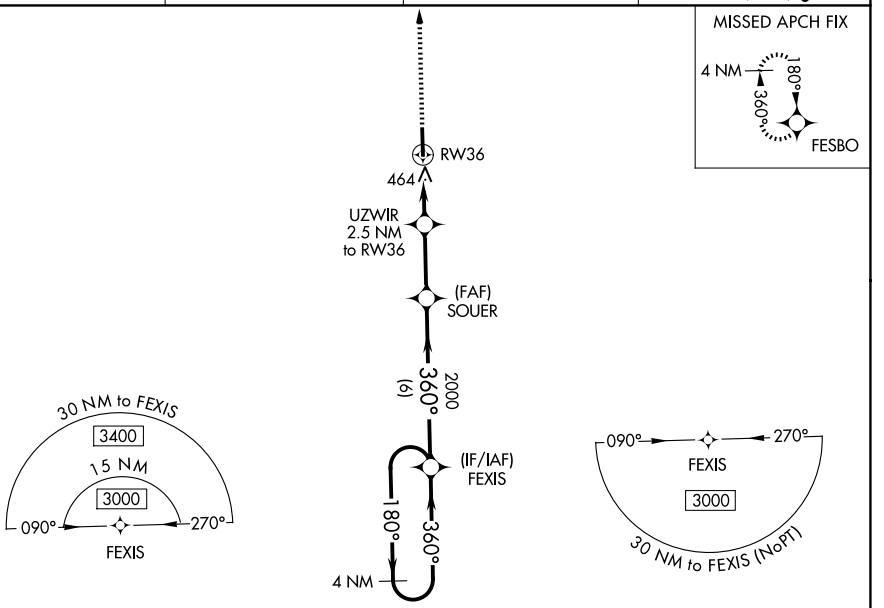

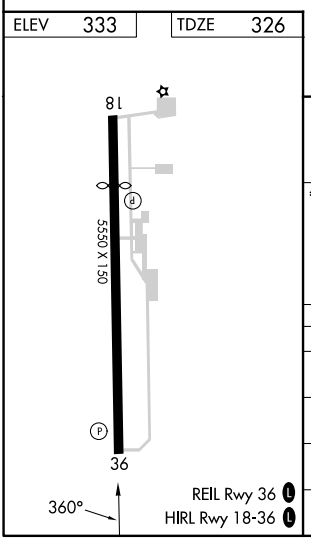

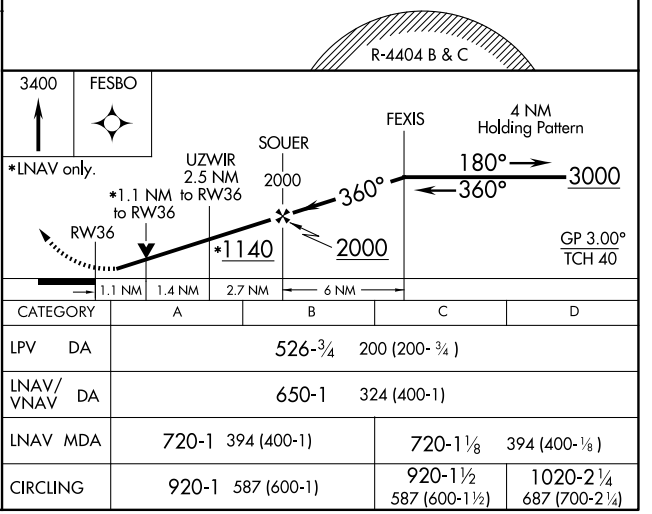

CATEGORY	A	B	C	D
LPV DA	526-¾ 200 (200-¾)			
LNAV/VNAV DA	650-1 324 (400-1)			
LNAV MDA	720-1 394 (400-1)		720-1⅛ 394 (400-⅛)	
CIRCLING	920-1 587 (600-1)		920-1½ 587 (600-1½)	1020-2¼ 687 (700-2¼)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026