LOC I-LQG	APP CRS	Rwy Ldg	5002
111.7	073°	TDZE	793
		Apt Elev	793

ILS or LOC RWY 7

LORAIN COUNTY RGNL (LPR)


For inoperative MALSR, increase S-LOC 7 Cats C/D visibility to 1⅜ mile. VDP NA with Cleveland-Hopkins Intl altimeter setting. When local altimeter setting not received, use Cleveland-Hopkins Intl altimeter setting and increase all DA 36 feet and all MDA 40 feet.

MALSR


MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 270° then left turn direct DJB VOR/DME and hold.


ASOS	CLEVELAND APP CON	CLNC DEL	UNICOM
118.925	125.35 346.325	125.7	122.7 (CTAF) L

DME REQUIRED

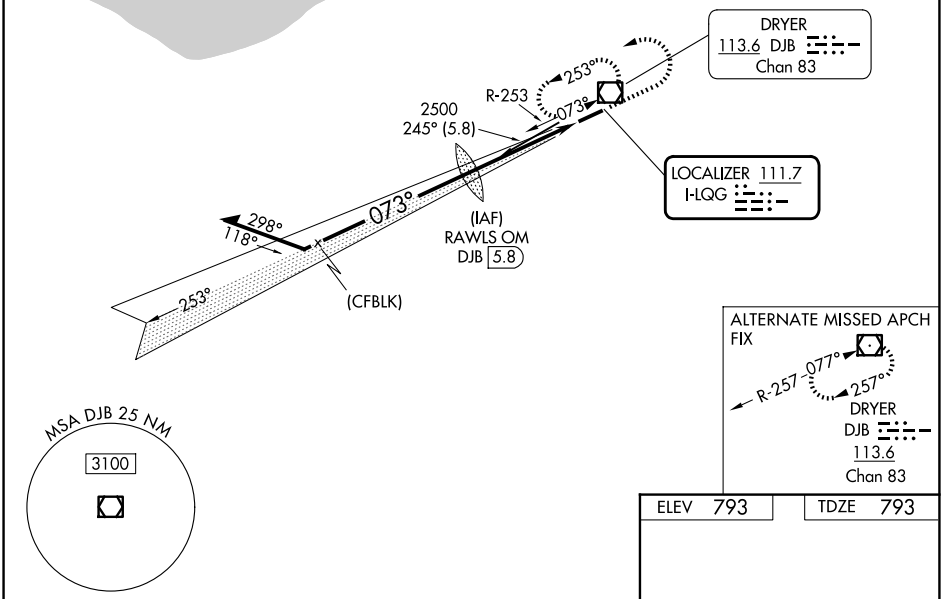

ELEV 793	TDZE 793



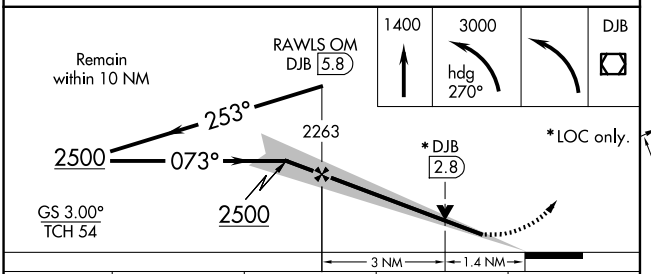

CATEGORY	A	B	C	D
S-ILS 07	993-½ 200 (200-½)			
S-LOC 07	1280-½ 487 (500-½)		1280-1 487 (500-1)	
CIRCLING	1280-1 487 (500-1)	1360-1 567 (600-1)	1420-1¾ 627 (700-1¾)	1420-2 627 (700-2)

REIL Rwy 25 L
HIRL Rwy 7-25 L

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026