# RNAV (GPS) Y RWY 3

MADISON RGNL (IMS)

| APP CRS | Rwy Ldg | 5000 |
|---|---|---|
| 035° | TDZE | 812 |
| | Apt Elev | 819 |


RNP APCH - GPS.


Rwy 3 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase *LNAV Cat C visibility and LNAV Cat visibility to 1⅜ SM. Circling NA for Cat C southeast of Rwy 3-21.

MALSF


MISSED APPROACH: Climbing right turn to 4000 direct GAMKE and hold, continue climb-in-hold to 4000.
* Missed approach requires minimum climb of 410 feet per NM to 1900.

| AWOS-3PT | LOUISVILLE APP CON | UNICOM |
|---|---|---|
| 119.175 | 132.075 327.0 | 123.0 (CTAF) L |

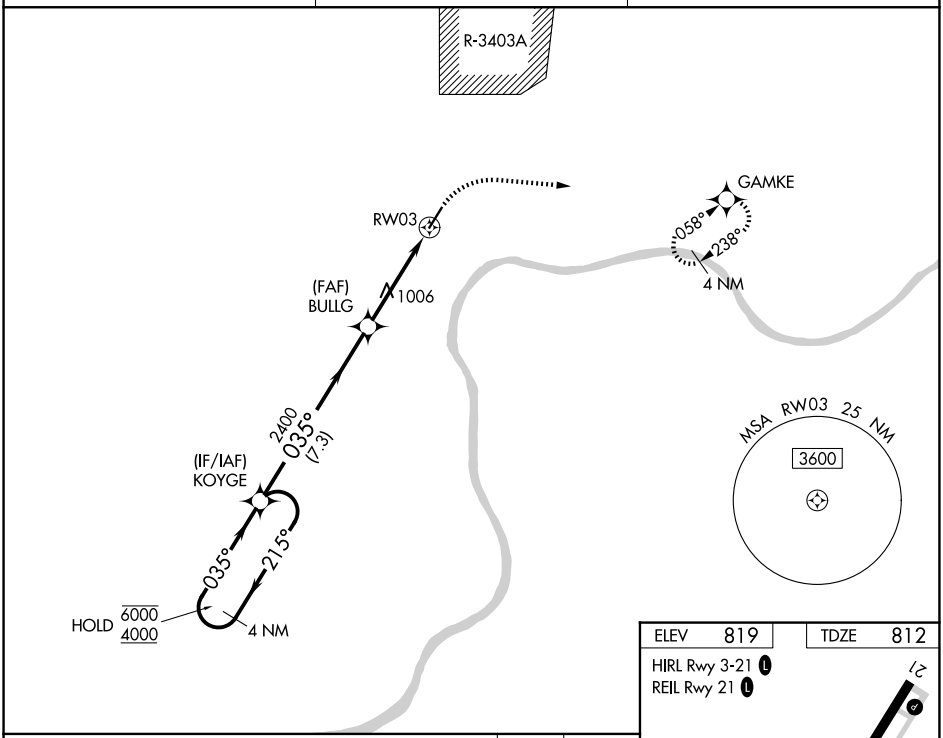

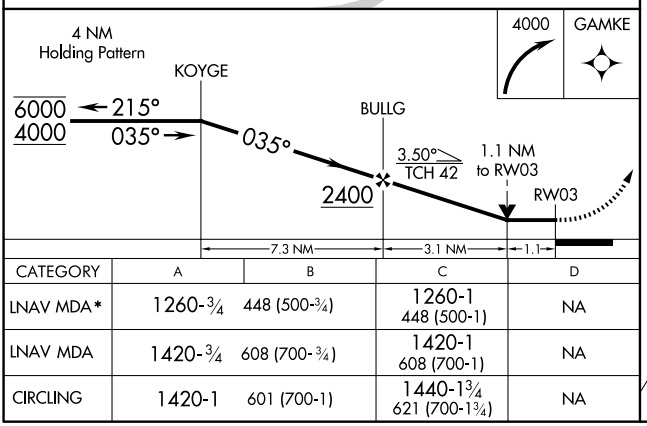
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA* | 1260-¾ | 448 (500-¾) | 1260-1<br>448 (500-1) | NA |
| LNAV MDA | 1420-¾ | 608 (700-¾) | 1420-1<br>608 (700-1) | NA |
| CIRCLING | 1420-1 | 601 (700-1) | 1440-1¾<br>621 (700-1¾) | NA |



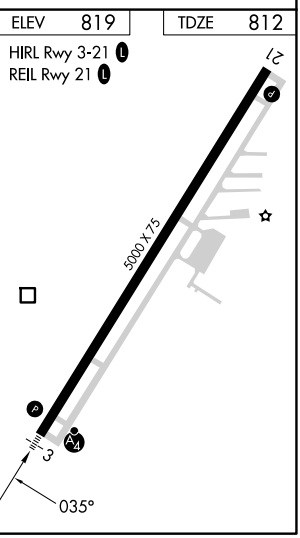


EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026