RNAV (GPS) RWY 18

FLETCHER FLD (CKM)


WAAS	APP CRS	Rwy Ldg	5404
CH 72619	183°	TDZE	173
W18A		Apt Elev	173

RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ⅛ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ⅛ SM. Circling Rwy 36 NA at night.

MISSED APPROACH: Climb to 2000 direct HULON and hold.


AWOS-3	MEMPHIS CENTER	UNICOM
120.675	135.3 335.8	122.8 (CTAF) L

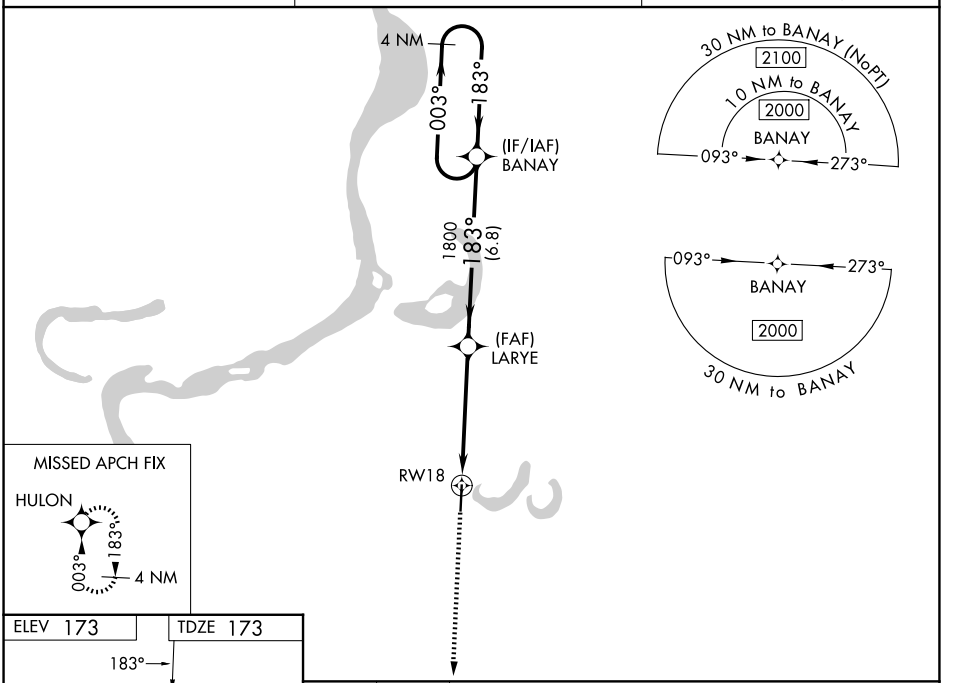

ELEV 173 TDZE 173

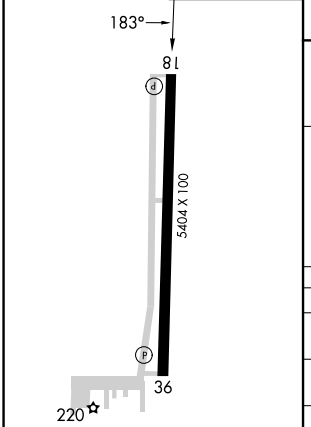

REIL Rwys 18 and 36 L
MIRL Rwy 18-36 L

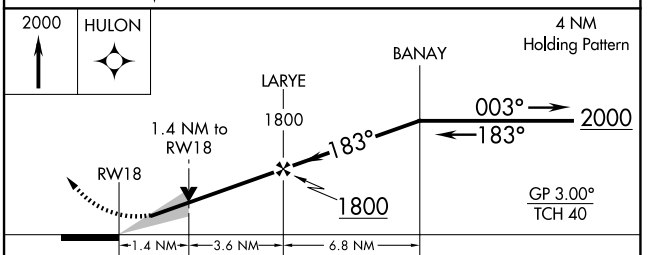

CATEGORY	A	B	C	D
LPV DA	423-⅞ 250 (300-⅞)			
LNAV/VNAV DA	587-1⅜ 414 (500-1⅜)			
LNAV MDA	640-1 467 (500-1)		640-1⅜ 467 (500-1⅜)	
CIRCLING	740-1 567 (600-1)		780-1¾ 607 (700-1¾)	780-2 607 (700-2)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026