RNAV (GPS) RWY 27

FULTON COUNTY (USE)


WAAS	APP CRS	Rwy Ldg	3882
CH 66028	274°	TDZE	777
W27A		Apt Elev	781

RNP APCH - GPS.


Rwy 27 helicopter visibility reduction below ¾ SM NA.
Circling NA to Rwys 18 and 36.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Circling Rwy 9 NA at night.

MISSED APPROACH: Climb to 3000 direct DUCZZ and hold.


AWOS-3PT	TOLEDO APP CON	UNICOM
127.375	134.35 317.55	123.0 (CTAF) L

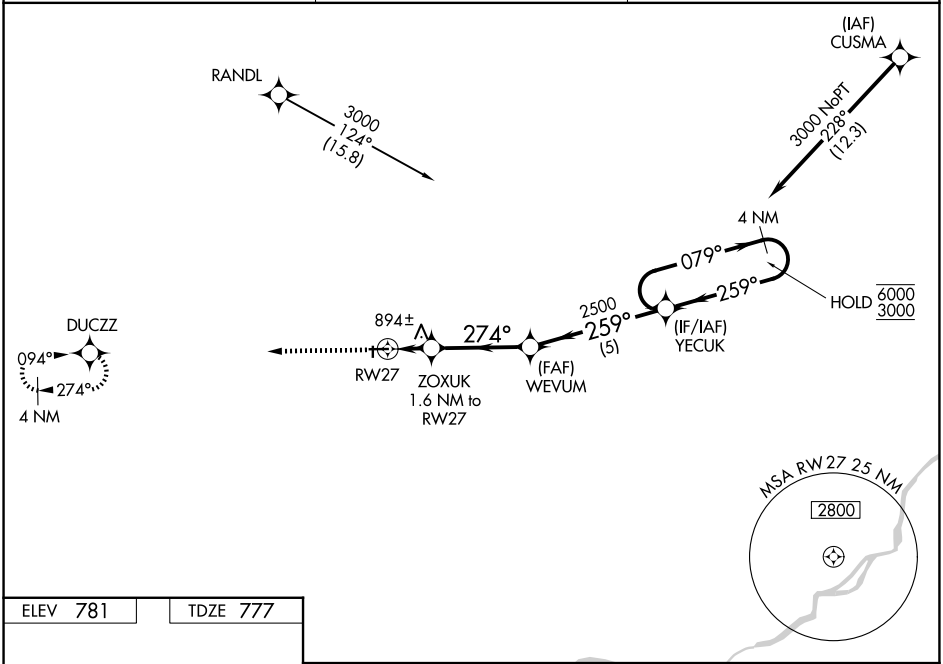

ELEV 781 | TDZE 777



REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

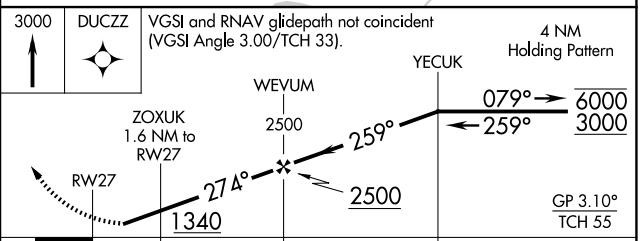

CATEGORY	A	B	C	D
LPV DA	1092-1 315 (400-1)			
LNAV/VNAV DA	1095-1 318 (400-1)			
LNAV MDA	1180-1 403 (400-1)		1180-1⅛ 403 (400-1⅛)	
CIRCLING	1280-1 499 (500-1)		1480-2 699 (700-2)	1480-2¼ 699 (700-2¼)

EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026