WAAS	APP CRS	Rwy Idg	4001
CH 86819	152°	TDZE	730
W15A		Apt Elev	730


RNAV (GPS) RWY 15

MOUNT PLEASANT MUNI (MPZ)

Baro-VNAV NA when using Burlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When VGSI inoperative, straight-in minimums NA at night. When local altimeter setting not received, use Burlington altimeter setting: increase LPV DA to 1031 feet, LNAV/VNAV DA to 1394 feet and all LNAV/VNAV visibilities ¼ mile; increase all MDA 60 feet, increase LNAV and Circling Cat C visibility ¼ mile. Circling NA to Rwy 3/21.

MISSED APPROACH: Climb to 3500 direct ODOZO and hold.

AWOS-3	CHICAGO CENTER	UNICOM
119.325	135.6 316.1	123.05 (CTAF) L

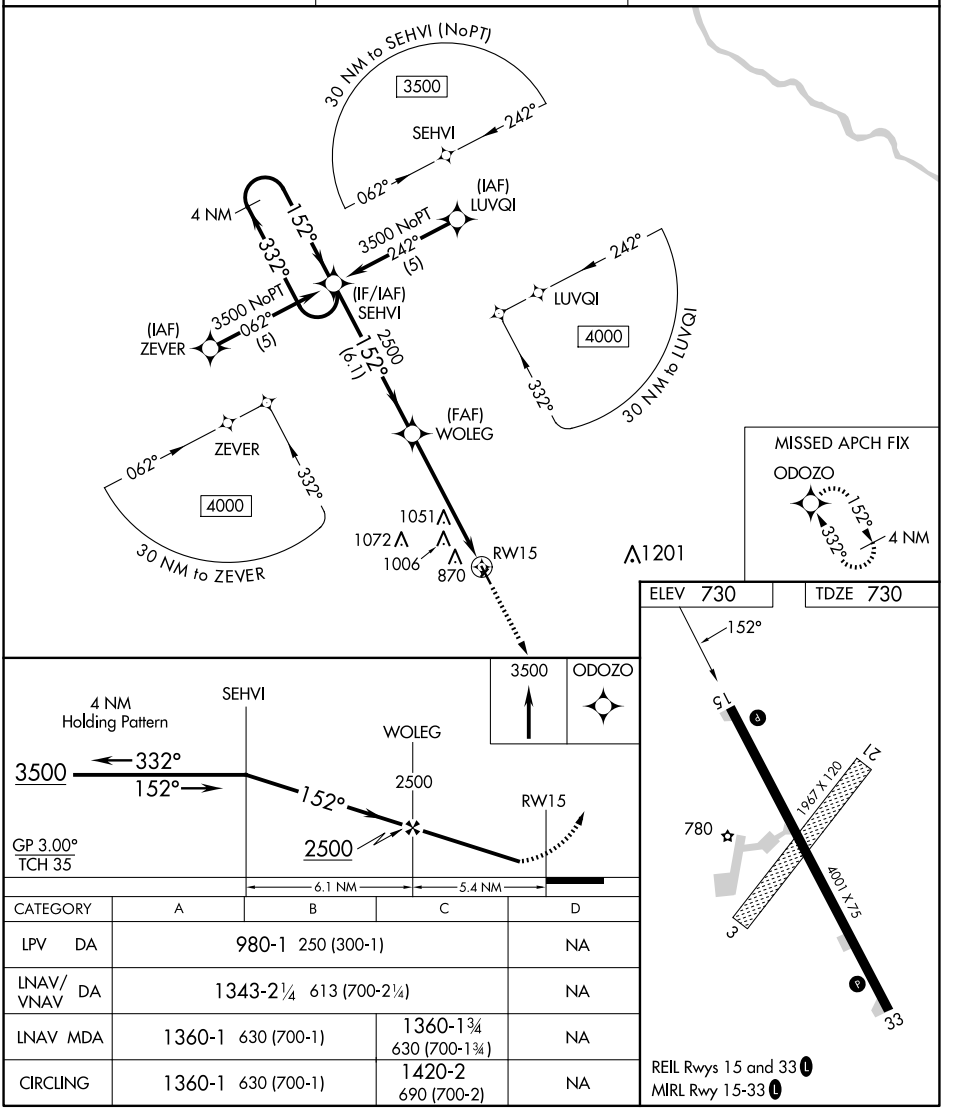

CATEGORY	A	B	C	D
LPV DA	980-1 250 (300-1)			NA
LNAV/VNAV DA	1343-2¼ 613 (700-2¼)			NA
LNAV MDA	1360-1 630 (700-1)		1360-1¾ 630 (700-1¾)	NA
CIRCLING	1360-1 630 (700-1)		1420-2 690 (700-2)	NA

REIL Rwys 15 and 33 L
MIRL Rwy 15-33 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026