
WAAS	APP CRS	Rwy Ldg	4305
CH 70423	352°	TDZE	1616
W35A		Apt Elev	1616

RNAV (GPS) RWY 35
CLINTON RGNL (CLK)

T A DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA to Rwy 13 and 31. When local altimeter setting not received, use Weatherford altimeter setting: Increase DA to 1902 and all visibilities ⅛ mile; increase all MDA 40 feet and visibility Cat C ¼ mile. Baro-VNAV and VDP NA when using Weatherford altimeter setting.

MISSED APPROACH: Climb to 2400 then climbing left turn to 4000 direct OSUCU and hold.


AWOS-3	FORT WORTH CENTER	UNICOM
119.225	128.4 269.37	122.8 (CTAF) L

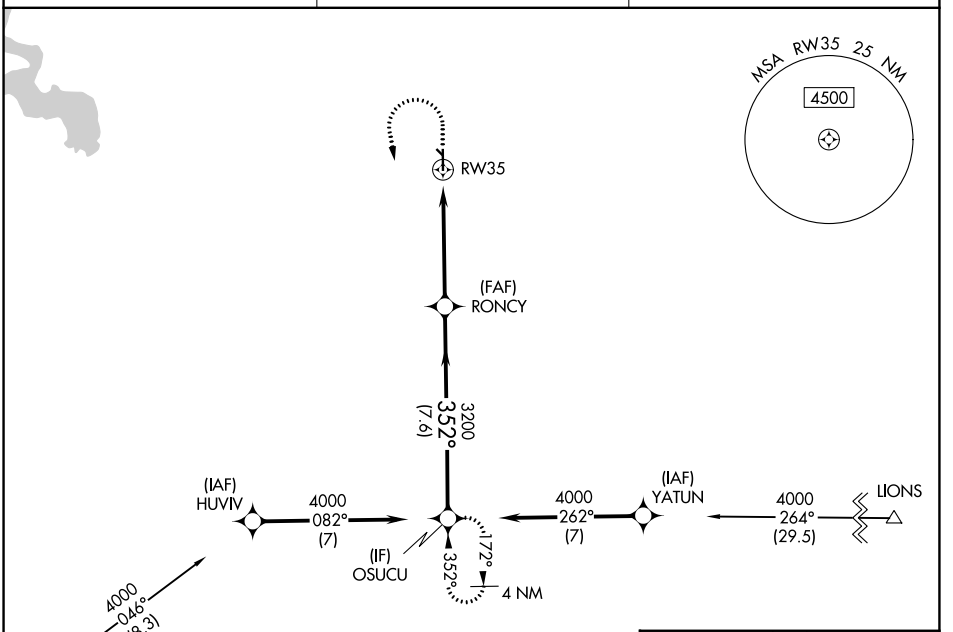

2400 | 4000 | OSUCU


*LNAV only. *1.3 NM to RW35

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

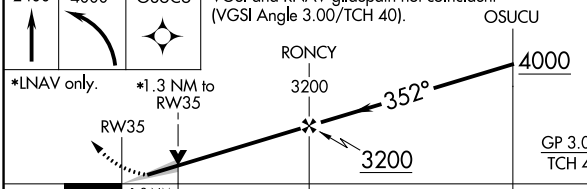

CATEGORY	A	B	C	D
LPV DA	1866-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	1870-⅞ 254 (300-⅞)			NA
LNAV MDA	2040-1 424 (500-1)		2040-1¼ 424 (500-1¼)	NA
CIRCLING	2100-1 484 (500-1)	2220-1 604 (700-1)	2320-2 704 (800-2)	NA

ELEV 1616 TDZE 1616

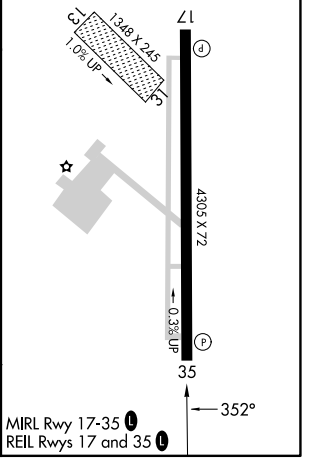

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026