RNAV (GPS) RWY 15

LINCOLN RGNL/KARL HARDER FLD (LHM)

WAAS CH 82618 W15A	APP CRS 151°	Rwy Ldg 6001 TDZE 121 Apt Elev 121


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
VDP and Baro-VNAV NA when using Beale AFB altimeter setting. When local altimeter setting not received, use Beale AFB altimeter setting and increase LPV DA to 361 feet; increase LNAV/VNAV DA to 492 feet; increase all MDAs 40 feet and increase Circling Cat D visibility ¼ SM. For inop ALS when using Beale AFB altimeter setting, increase LNAV Cat D visibility to 1¼ .


MALSR

MISSED APPROACH: Climb to 2500 direct MUCGU and on track 131° to ROZZY and hold.

AWOS-3	NORCAL APP CON	UNICOM
124.25	125.4 259.1	123.0 (CTAF)

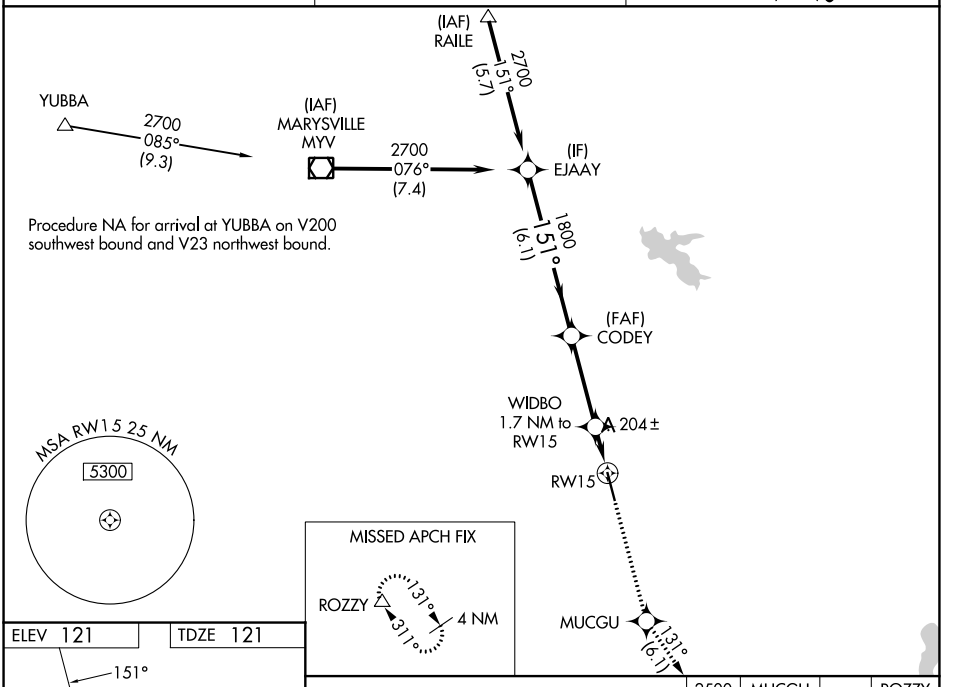

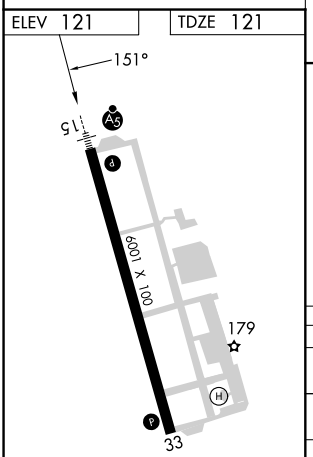

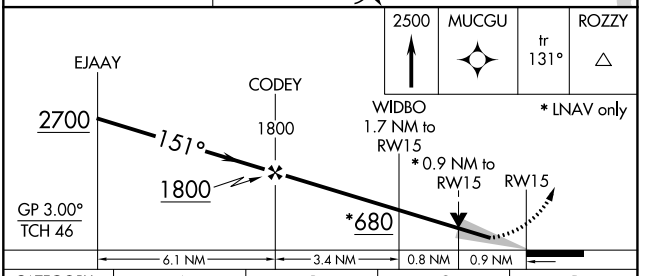

CATEGORY	A	B	C	D
LPV DA	321-½ 200 (200-½)			
LNAV/VNAV DA	452-¾ 331 (400-¾)			
LNAV MDA	460-½ 339 (400-½)			460-1 339 (400-1)
CIRCLING	520-1 399 (400-1)	580-1 459 (500-1)	600-1½ 479 (500-1½)	760-2 639 (700-2)

SW-2, 26 NOV 2026 to 24 DEC 2026