WAAS CH **70416** **W24A**	APP CRS **246°**	Rwy Ldg **6004** TDZE **486** Apt Elev **486**

RNAV (GPS) RWY 24


LANCASTER COUNTY-MC WHIRTER FLD (LKR)

RNP APCH - GPS.


Straight-in/Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Baro-VNAV and VDP NA when using UZA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use UZA altimeter setting: increase LPV DA to 805 feet; increase LNAV/VNAV DA to 1086 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2200 direct CORON and hold.

AWOS-3	CHARLOTTE APP CON	GCO	UNICOM
120.825	**120.05 307.8**	**121.725**	**122.725** (CTAF) L

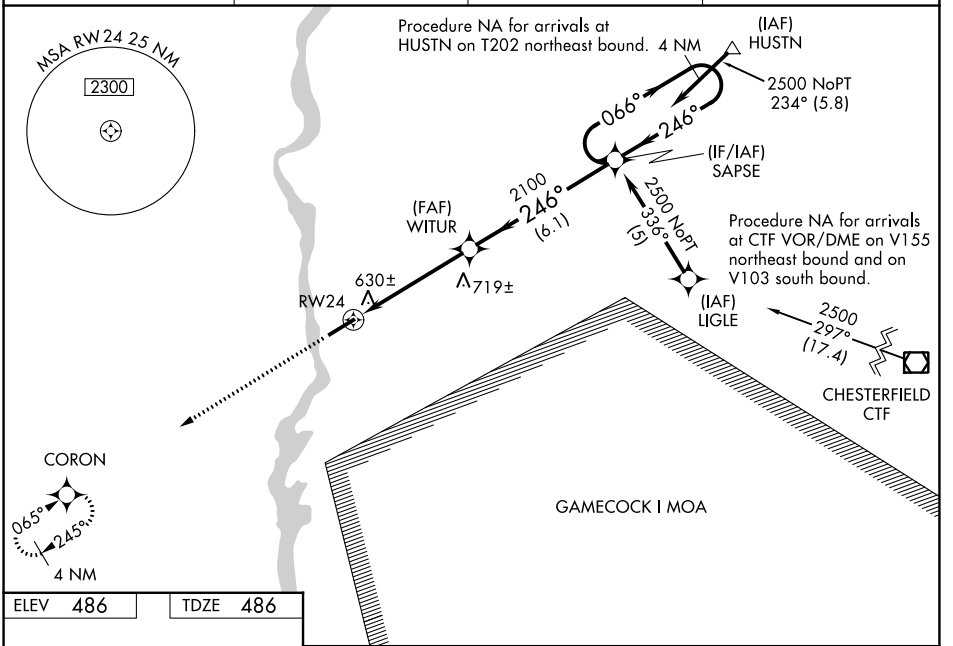


ELEV 486	TDZE 486



MIRL Rwy 6-24 L

REIL Rwys 6 and 24 L

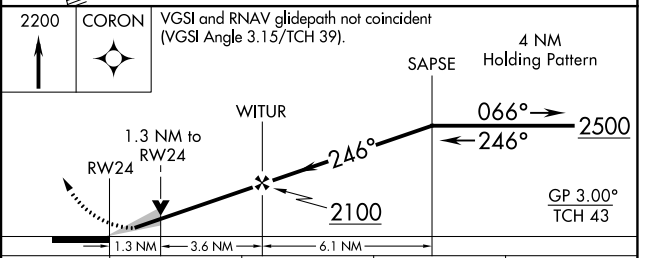

CATEGORY	A	B	C	D
LPV DA	736-1 250 (300-1)			
LNAV/VNAV DA	1017-2 531 (600-2)			
LNAV MDA	960-1 474 (500-1)		960-1⅜ 474 (500-1⅜)	960-1½ 474 (500-1½)
CIRCLING	1040-1 554 (600-1)	1060-1 574 (600-1)	1120-1¾ 634 (700-1¾)	1160-2¼ 674 (700-2¼)

SE-2, 26 NOV 2026 to 24 DEC 2026
SE-2, 26 NOV 2026 to 24 DEC 2026