WAAS CH 63109 W36A	APP CRS 002°	Rwy Ldg 8498 TDZE 15 Apt Elev 23


RNAV (GPS) RWY 36


STENNIS INTL (HSA)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA for Cat E West of Rwy 18-36. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Gulfport altimeter setting. When local altimeter setting not received, use Gulfport altimeter setting and increase LPV DA to 332 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ⅛ mile and LNAV Cats C/D/E and Circling Cats D/E visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct STENN and hold.

AWOS-3PT	GULFPORT APP CON ★	STENNIS TOWER ★	GND CON	UNICOM
118.375	124.6 354.1 (130°-309°) 127.5 254.25 (310°-129°)	127.15 (CTAF) L 229.4	121.725 229.4	122.95

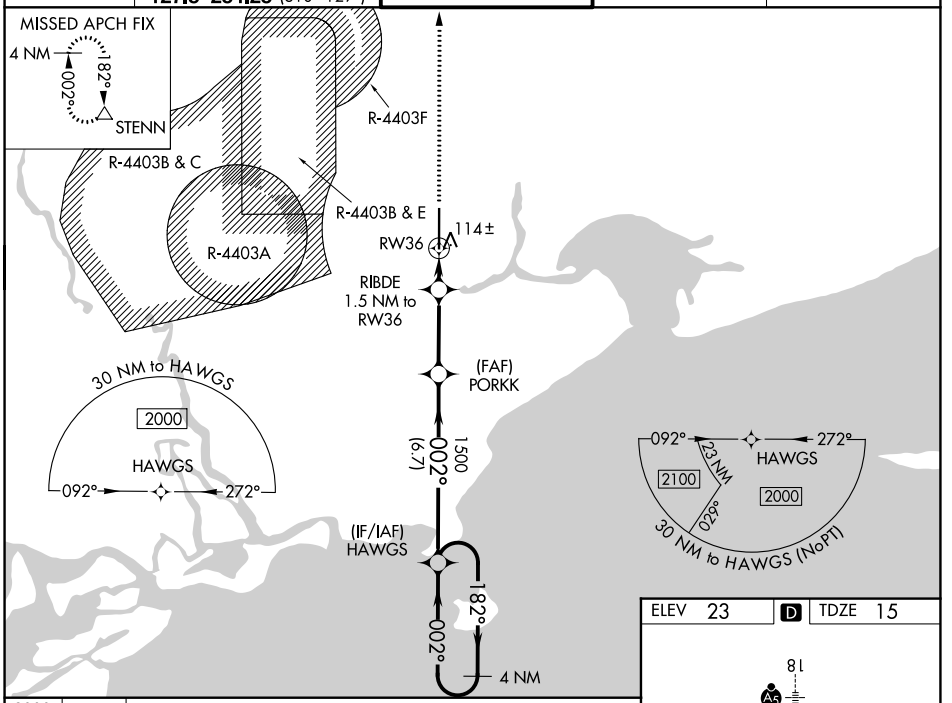

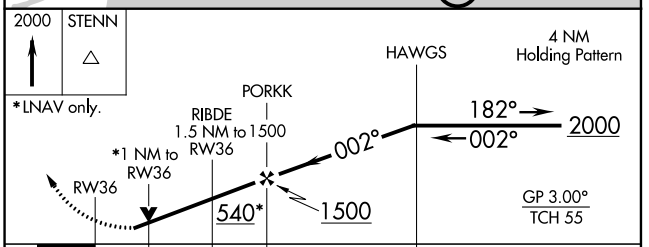

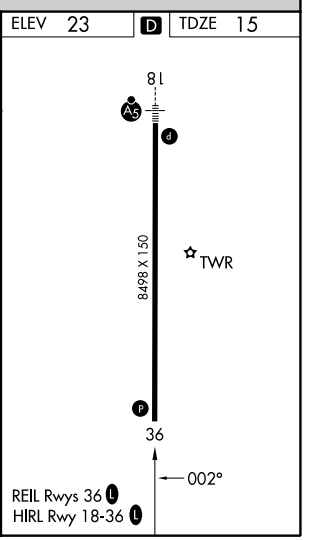

CATEGORY	A	B	C	D	E
LPV DA		285-⅞	270 (300-⅞)		
LNAV/VNAV DA		297-⅞	282 (300-⅞)		
LNAV MDA		380-1	365 (400-1)		
CIRCLING	480-1 457 (500-1)		520-1½ 497 (500-1½)	820-2½ 797 (800-2½)	820-2¾ 797 (800-2¾)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026