ILS or LOC RWY 18

ROSCOE TURNER (CRX)

LOC I-UUR	APP CRS	Rwy Ldg	6500
111.1	176°	TDZE	414
		Apt Elev	425


ADF required. RNAV 1-GPS.


Autopilot coupled approach NA below 1040.
For inop ALS, increase S-LOC 18 Cats C and D visibility to 1¾ SM.


MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2400 direct UU LOM and hold, continue climb-in-hold to 2400.

AWOS-3PT	MEMPHIS CENTER	UNICOM
118.675	135.9 273.55	122.8 (CTAF)

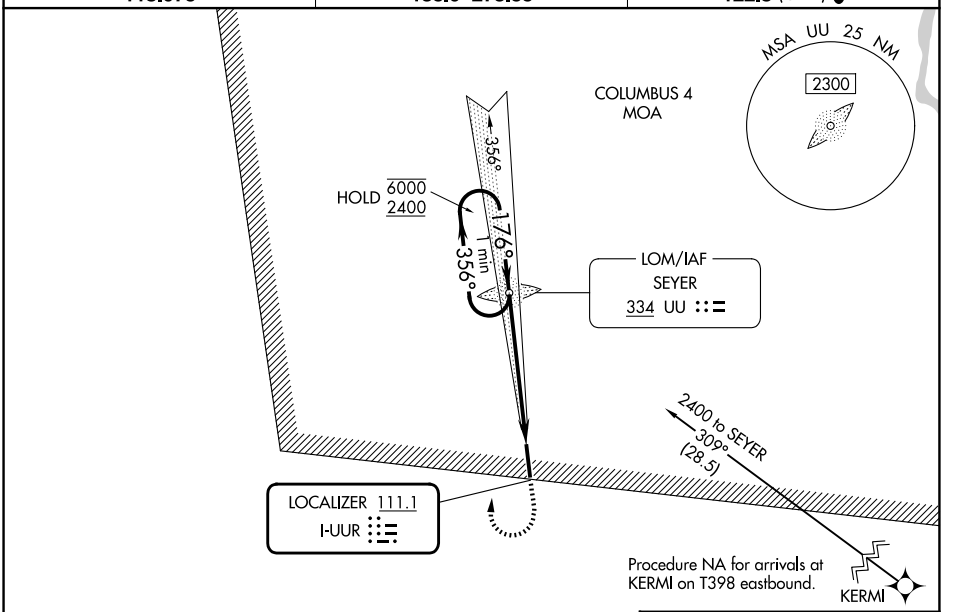

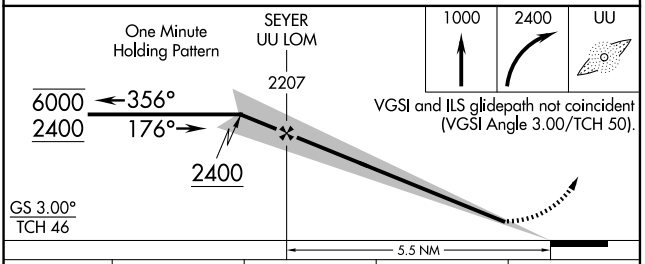

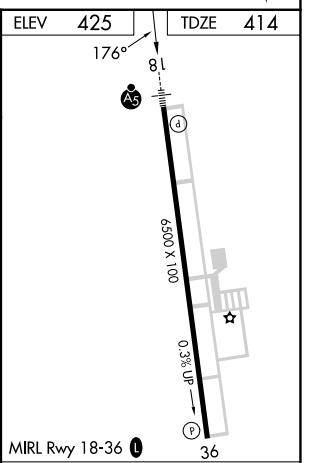

CATEGORY	A	B	C	D
S-ILS 18	614-½ 200 (200-½)			
S-LOC 18	1020-½ 606 (600-½)		1020-1⅜ 606 (600-1⅜)	
CIRCLING	1020-1 595 (600-1)		1100-2 675 (700-2)	1160-2¼ 735 (800-2¼)

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026