RNAV (GPS) RWY 18

ROSCOE TURNER (CRX)

WAAS CH 72806 W18A	APP CRS 176°	Rwy Ldg 6500 TDZE 414 Apt Elev 425


RNP APCH-GPS.


Baro-VNAV NA when using Selmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Selmer altimeter setting. When local altimeter setting not received, use Selmer altimeter setting and increase LPV DA to 682 feet, increase LNAV/VNAV DA to 812 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ⅜ SM and Circling visibility Cats C and D ½ SM. For inop ALS when using Selmer altimeter setting, increase LPV all Cats visibility to ⅞ SM and LNAV visibility Cats C and D to 1¾ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct WEDGO and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
118.675	135.9 273.55	122.8 (CTAF)

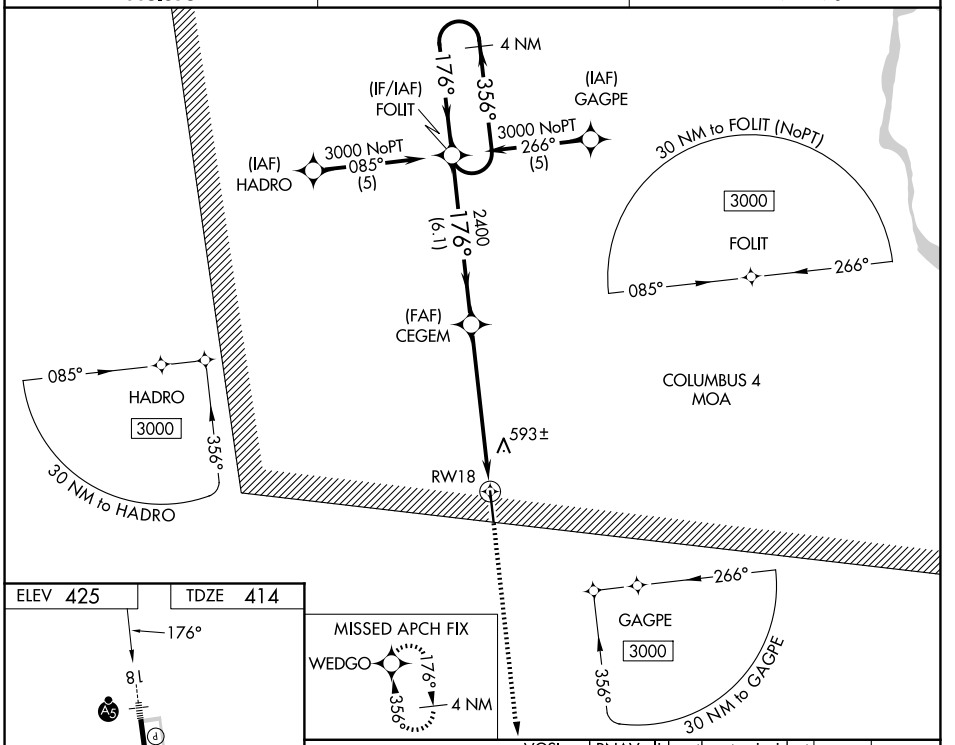

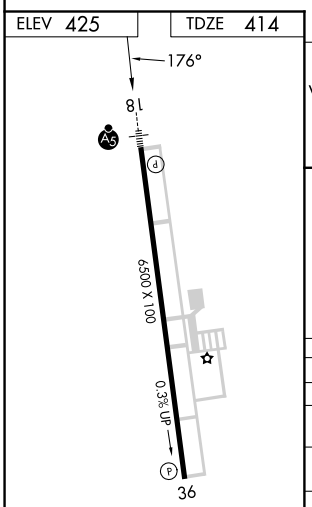

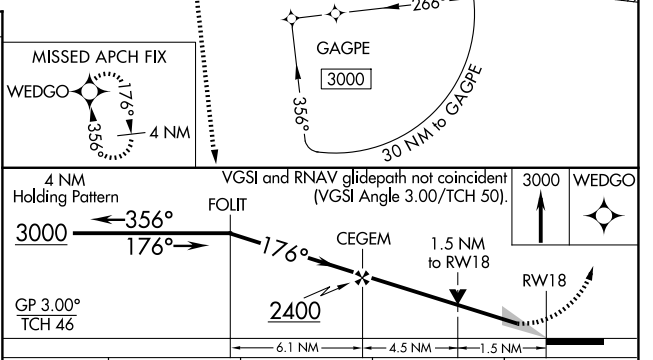

CATEGORY	A	B	C	D
LPV DA	614-½	200 (200-½)		
LNAV/VNAV DA	744-½	330 (400-½)		
LNAV MDA	940-½	526 (600-½)	940-1	526 (600-1)
CIRCLING	940-1	515 (600-1)	1100-2 675 (700-2)	1160-2¼ 735 (800-2¼)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026