LOC/DME I-OAJ	APP CRS	Rwy Ldg	7100
108.7	052°	TDZE	89
Chan 24		Apt Elev	93

ILS or LOC RWY 5

ALBERT J ELLIS (OAJ)


VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase all DA to 382 feet; increase all MDAs 100 feet and visibility S-LOC 5 Cats C/D and Circling Cats C/D ¼ SM; OGOYO fix minimums: increase visibility S-LOC 5 Cats C/D ⅜ SM and Circling Cats C/D ¼ SM. For inoperative MALSR, increase S-LOC 5 Cats C/D visibility to 1⅜ mile, increase OGOYO fix minimums S-LOC 5 Cats C/D visibility to 1 mile. For inoperative MALSR when using Wilmington altimeter setting, increase S-ILS 5 all Cats visibility to ⅞ mile, increase S-LOC 5 Cats C/D visibility to 1⅝ mile, increase OGOYO fix minimums S-LOC 5 Cats C/D visibility to 1⅜ mile. ADF required.

MALSR


MISSED APPROACH: Climb to 600 then climbing left turn to 2100 direct ELLAS LOM/I-OAJ 7.4 DME and hold.


ATIS	WILMINGTON APP CON ★	ELLIS TOWER ★	GND CON	UNICOM
124.475	135.75 317.425	132.65 (CTAF) L	125.4	122.95

ADF or DME REQUIRED

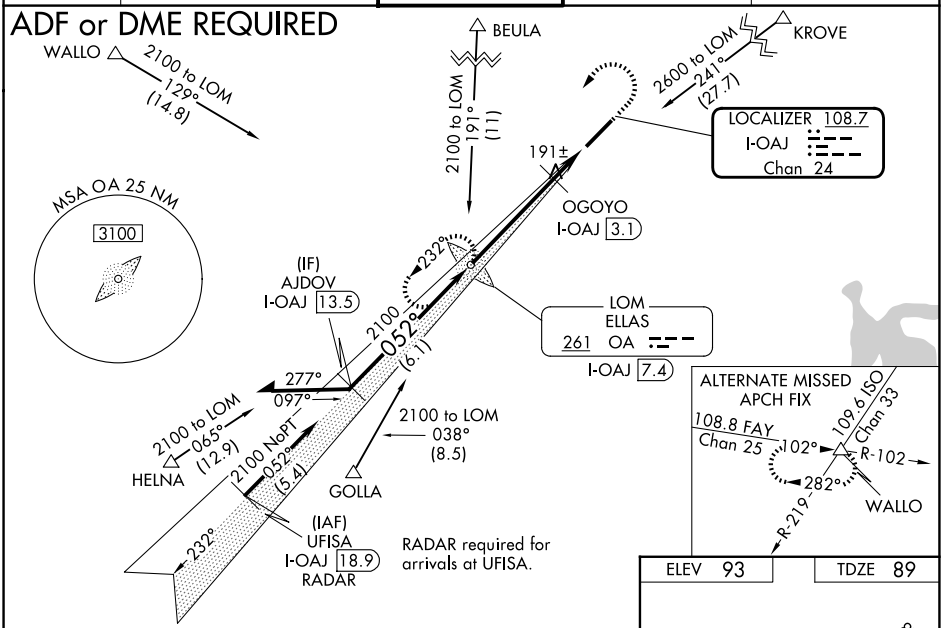

ELEV 93	TDZE 89

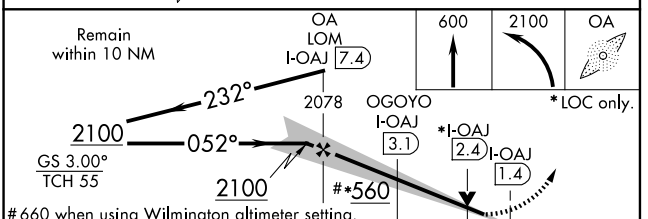



CATEGORY	A	B	C	D
S-ILS 5	289-½ 200 (200-½)			
S-LOC 5	560-½ 471 (500-½)		560-1 471 (500-1)	
CIRCLING	560-1 467 (500-1)		720-1¾ 627 (700-1¾)	720-2 627 (700-2)
OGOYO FIX MINIMUMS (DME REQUIRED)				
S-LOC 5	460-½ 371 (400-½)		460-⅝ 371 (400-⅝)	
CIRCLING	540-1 447 (500-1)	560-1 467 (500-1)	720-1¾ 627 (700-1¾)	720-2 627 (700-2)

FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

SE-2, 26 NOV 2026 to 24 DEC 2026
SE-2, 26 NOV 2026 to 24 DEC 2026