RNAV (GPS) RWY 5

ALBERT J ELLIS (OAJ)

WAAS	APP CRS	Rwy Ldg	7100
CH 49009	052°	TDZE	89
W05A		Apt Elev	93


TAA


Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP -0.3 NA. VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase LPV DA to 383 feet; increase LNAV/VNAV DA to 559 feet and all visibilities ⅜ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ¼ SM. For inoperative MALSR, increase LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Wilmington altimeter setting, increase LPV all Cats visibility to ⅞ mile, increase LNAV/VNAV all Cats to 1½ mile, and LNAV Cat C/D to 1⅜ mile.

MALSR


MISSED APPROACH: Climb to 900 then climbing left turn to 2100 direct CUVAL and hold.

ATIS	WILMINGTON APP CON ★	ELLIS TOWER ★	GND CON	UNICOM
124.475	135.75 317.425	132.65 (CTAF) L	125.4	122.95

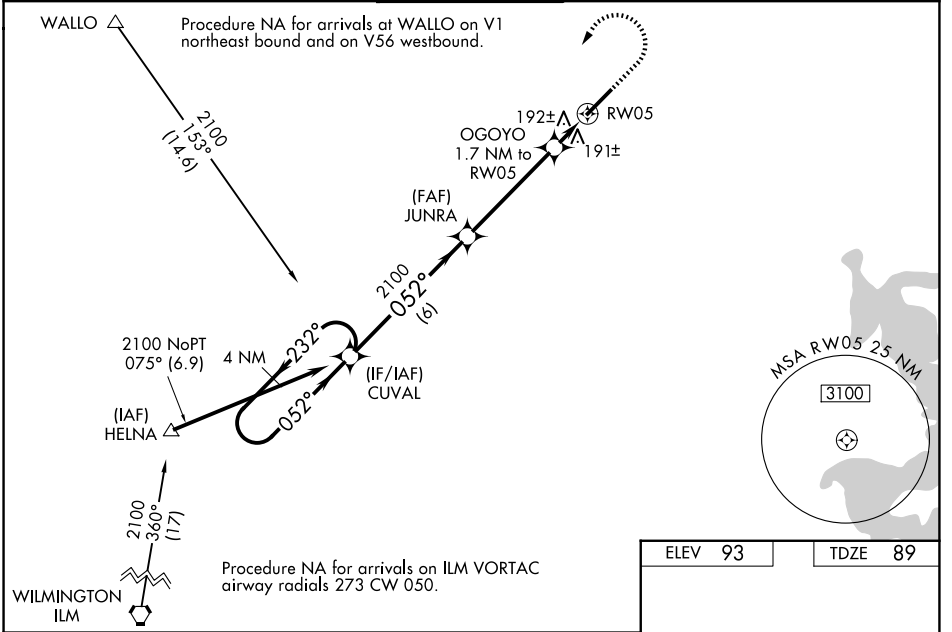

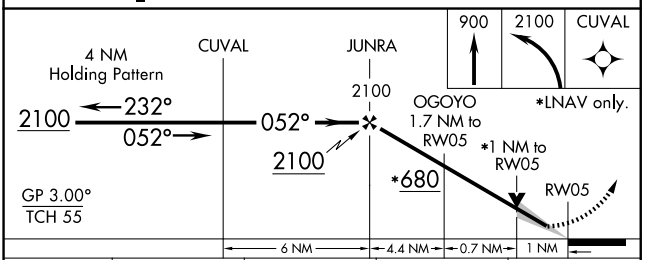

CATEGORY	A	B	C	D
LPV DA	289-½	200 (200-½)		
LNAV/VNAV DA	465-¾	376 (400-¾)		
LNAV MDA	460-½	371 (400-½)	460-⅝	371 (400-⅝)
CIRCLING	540-1 447 (500-1)	560-1 467 (500-1)	720-1¾ 627 (700-1¾)	720-2 627 (700-2)

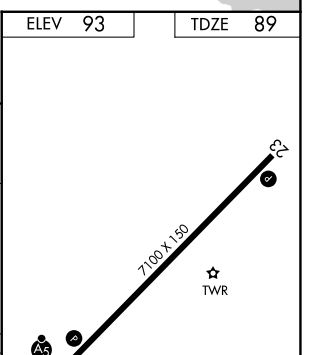

SE-2, 26 NOV 2026 to 24 DEC 2026
SE-2, 26 NOV 2026 to 24 DEC 2026