RNAV (GPS) RWY 35

NATCHITOCHES RGNL (IER)

WAAS CH 86510 W35A	APP CRS 342°	Rwy Ldg 5003 / TDZE 121 / Apt Elev 121

RNP APCH.


Inop table does not apply to LPV all Cats, and LNAV Cats A and B. Baro-VNAV NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: Increase LPV DA to 462 feet; increase LNAV/VNAV DA to 577 feet and visibility all Cats ¼ SM; increase all MDA 100 feet and LNAV Cat C visibility ¼ SM and Circling Cat C visibility ½ SM. For inoperative ODALS, increase LNAV/VNAV all Cats visibility ⅛ mile.

ODALS

MISSED APPROACH: Climb to 2000 direct JEVBA and hold.

AWOS-3	MAKS APP CON	UNICOM
119.025	125.4 302.2	122.8 (CTAF) L


MISSED APCH FIX




ELEV 121 TDZE 121

MIRL Rwys 7-25 and 17-35 L

REIL Rwys 7 and 17 L

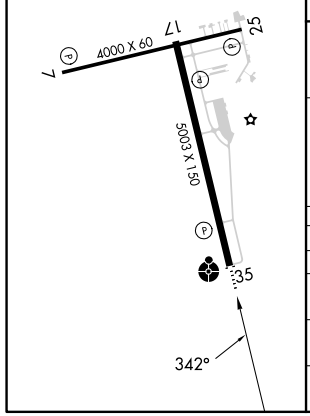

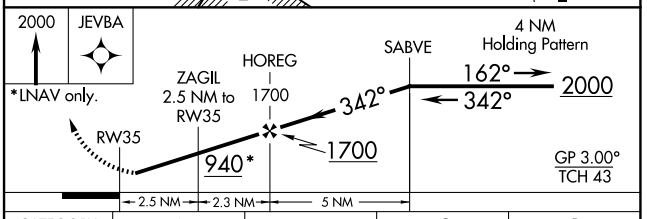

CATEGORY	A	B	C	D
LPV DA	371-1 250 (300-1)			NA
LNAV/VNAV DA	486-1⅛ 365 (400-1⅛)			NA
LNAV MDA	580-1 459 (500-1)		580-1⅛ 459 (500-1⅛)	NA
CIRCLING	680-1 559 (600-1)	740-1 619 (700-1)	860-2 739 (800-2)	NA

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026