RNAV (GPS) RWY 23


VENICE MUNI (VNC)


WAAS	APP CRS	Rwy Ldg	4377
CH 53433	230°	TDZE	18
W23A		Apt Elev	18

When local altimeter setting not received, use Sarasota altimeter setting and increase all MDA 60 feet and increase LP and LNAV Cats C, D visibility ⅛ mile, and Circling Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. VDP NA with Sarasota altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2900 direct WUPOS and hold.


AWOS-3	TAMPA APP CON	UNICOM
119.275	119.65 353.575	122.725 (CTAF) L

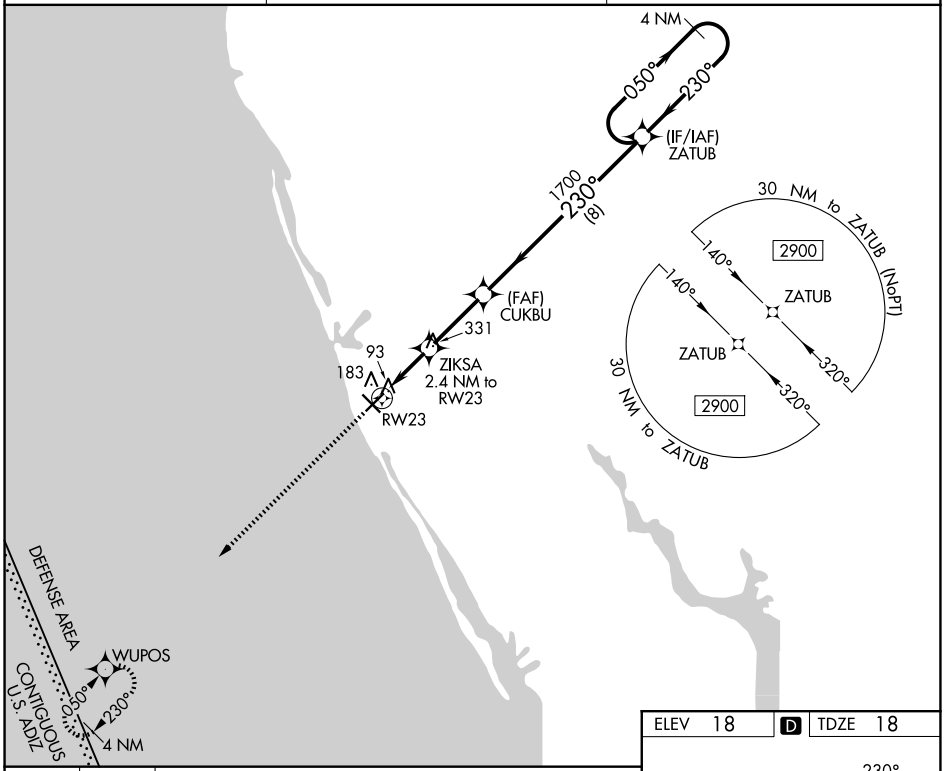

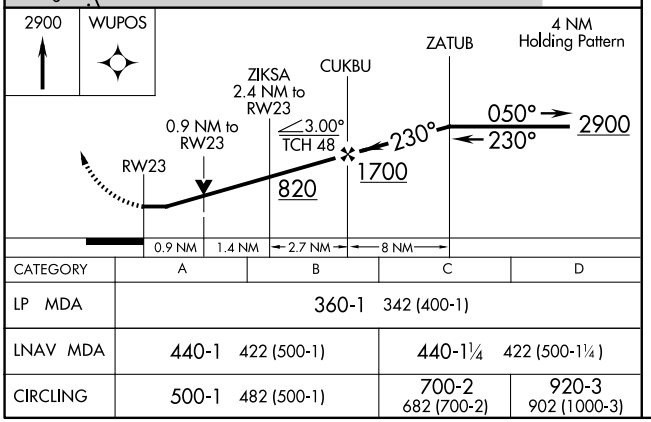

CATEGORY	A	B	C	D
LP MDA	360-1 342 (400-1)			
LNAV MDA	440-1 422 (500-1)		440-1¼ 422 (500-1¼)	
CIRCLING	500-1 482 (500-1)		700-2 682 (700-2)	920-3 902 (1000-3)

ELEV 18 D TDZE 18

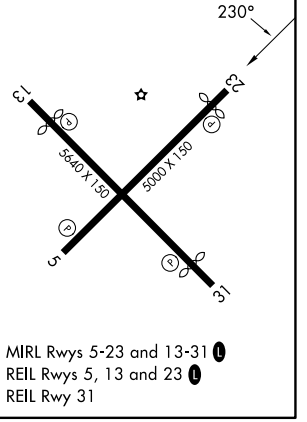

MIRL Rwys 5-23 and 13-31 L
REIL Rwys 5, 13 and 23 L
REIL Rwy 31

SE-3, 26 NOV 2026 to 24 DEC 2026

SE-3, 26 NOV 2026 to 24 DEC 2026