
WAAS	APP CRS	Rwy Ldg 5402
CH 72937	339°	TDZE 204
W34A		Apt Elev 207

RNAV (GPS) RWY 34
HANOVER COUNTY MUNI (OFP)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Richmond Intl altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile. Baro-VNAV and VDP NA when using Richmond Intl altimeter setting.

MISSED APPROACH: Climb to 700 then climb to 2000 direct COATT and hold.


ASOS	POTOMAC APP CON	CLNC DEL	UNICOM
119.025	(001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2	125.4	122.7 (CTAF) L

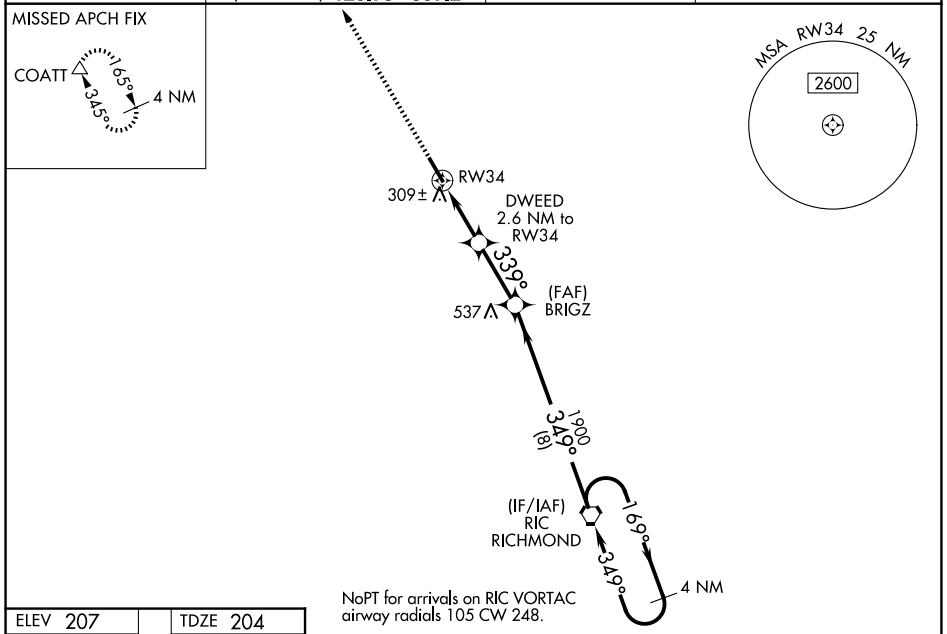

ELEV 207 TDZE 204

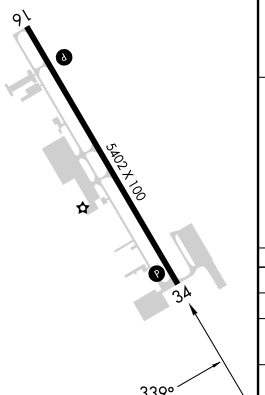

REIL Rwys 16 and 34 L
HIRL Rwy 16-34 L

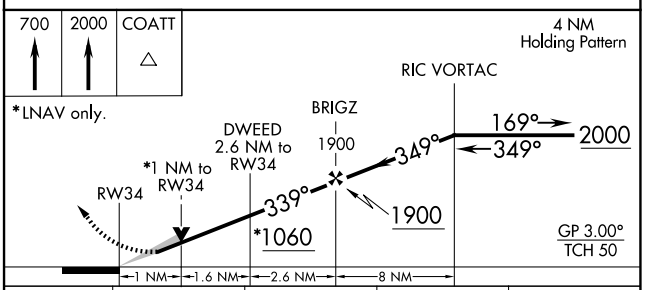

CATEGORY	A	B	C	D
LPV DA	454-1		250 (300-1)	
LNAV/VNAV DA	493-1		289 (300-1)	
LNAV MDA	560-1		356 (400-1)	
CIRCLING	660-1	453 (500-1)	900-2 693 (700-2)	1020-2¾ 813 (900-2¾)

NE-3, 26 NOV 2026 to 24 DEC 2026
NE-3, 26 NOV 2026 to 24 DEC 2026