RNAV (GPS) Z RWY 19

RICHLAND (RLD)

APP CRS	Rwy Ldg	4009
189°	TDZE	390
	Apt Elev	394


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. Baro-VNAV and VDP NA when using PSC altimeter setting. For inop ALS when using PSC altimeter setting, increase LNAV Cats C and D visibility to 1⅜ SM. When local altimeter setting not received, use PSC altimeter setting and increase LNAV/VNAV DA to 671 feet; increase all MDAs 20 feet and LNAV visibility Cats C and D ⅛ SM, and Circling visibility Cat C ¼ SM.


MALS

MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct BAKCA and hold.
*Missed approach requires minimum climb of 340 feet per NM to 2000; if unable to meet climb gradient, see RNAV (GPS) Y RWY 19.

AWOS-3PT	SPOKANE APP CON*	CLNC DEL	UNICOM
132.675	128.75 377.2	122.4	122.7 (CTAF) L

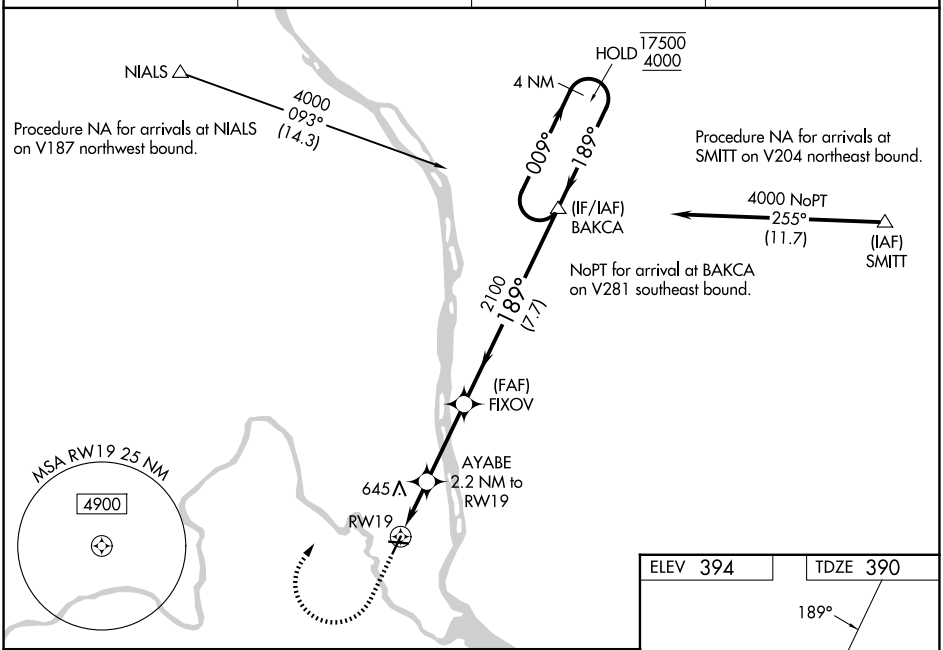

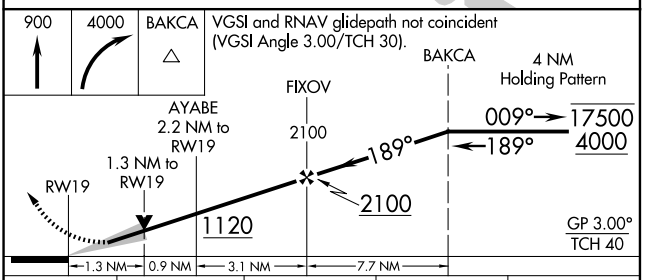

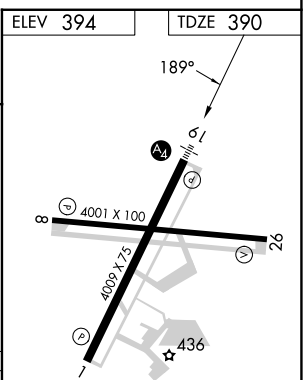

CATEGORY	A	B	C	D
LNAV/VNAV DA*	651-⅞ 261 (300-⅞)			
LNAV MDA*	840-⅞ 450 (500-⅞)		840-1 450 (500-1)	
CIRCLING	840-1 446 (500-1)	1000-1 606 (700-1)	1200-2¼ 806 (900-2¼)	1960-3 1566 (1600-3)

REIL Rwys 1 and 19 L
MIRL Rwy 1-19 and 8-26 L

NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026