RNAV (GPS) RWY 5

CRAWFORDSVILLE RGNL (CFJ)


WAAS	APP CRS	Rwy Ldg	5506
CH 82739	047°	TDZE	797
W05A		Apt Elev	800


RNP APCH - GPS.

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using GPC altimeter setting. When local altimeter setting not received, use GPC altimeter setting: increase LPV DA to 1128 feet; LNAV/VNAV DA to 1248 feet and all visibilities ¼ SM; increase all MDAs 60 feet and Circling Cats C and D visibilities ¼ SM.


MISSED APPROACH: Climb to 2700 direct CONUM and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
125.65	119.05 317.8	122.8 (CTAF) L

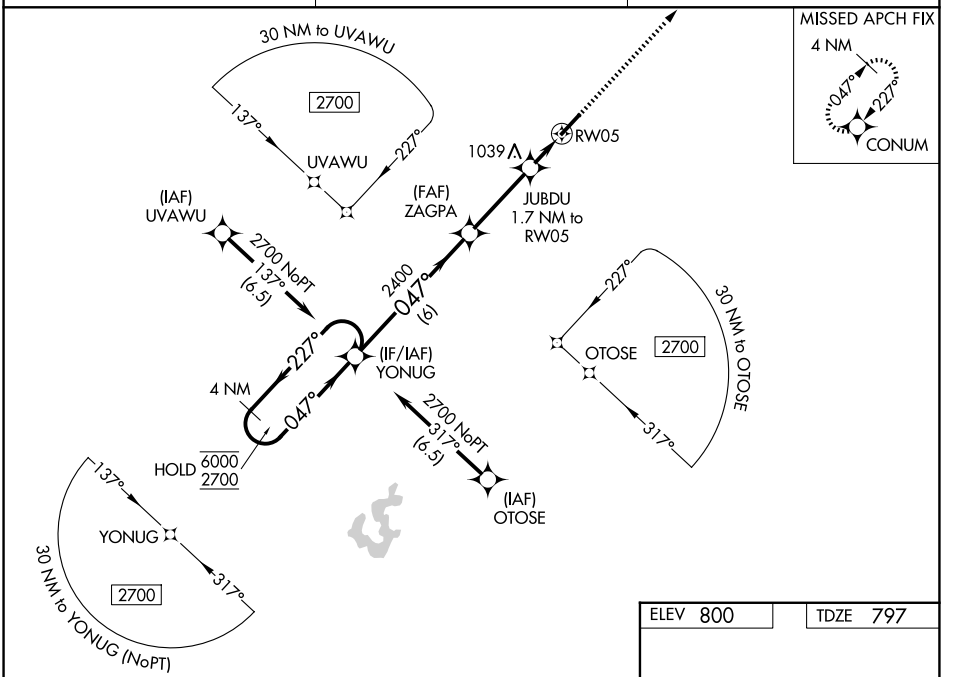

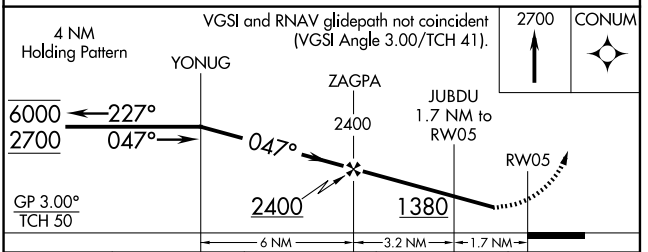

CATEGORY	A	B	C	D
LPV DA	1076-1 279 (300-1)			
LNAV/VNAV DA	1196-1⅛ 399 (400-1⅛)			
LNAV MDA	1240-1 443 (500-1)		1240-1⅜ 443 (500-1⅜)	
CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1¾ 640 (700-1¾)	1520-2¼ 720 (800-2¼)



REIL Rwys 5 and 23 L
MIRL Rwy 5-23 L

EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026