RNAV (GPS) RWY 35

HAMPTON MUNI (HPT)


WAAS	APP CRS	Rwy Ldg	4020
CH 77833	357°	TDZE	1168
W35A		Apt Elev	1176


VDP and Baro-VNAV NA when using Mason City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet and all MDA 80 feet, and LNAV/VNAV all Cats visibility ¼ mile.

NA

MISSED APPROACH: Climb to 4000 direct WIBUD and hold, continue climb-in-hold to 4000.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
121.025	134.0 288.3	122.7 (CTAF) L

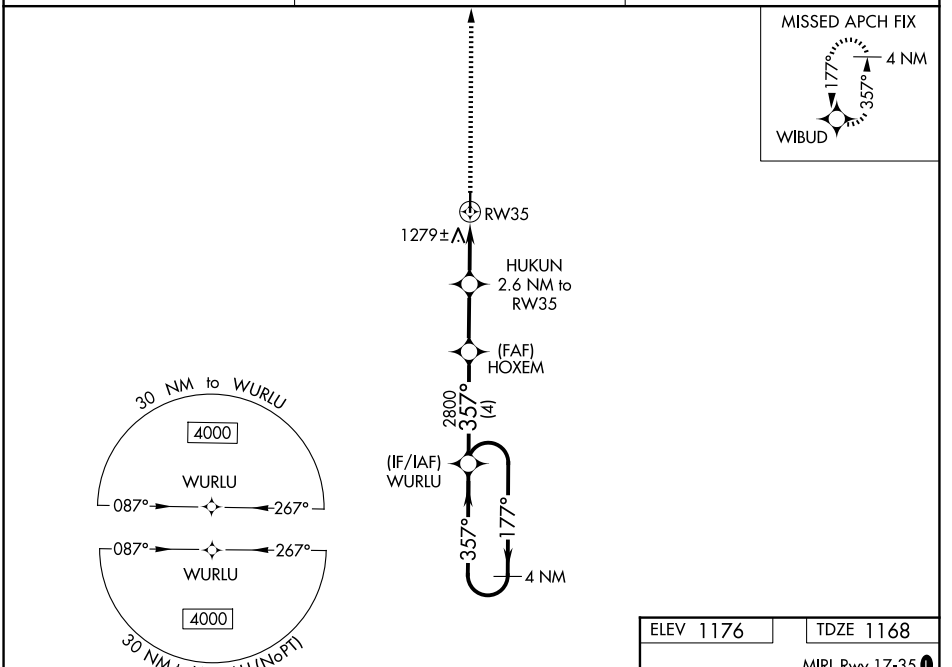

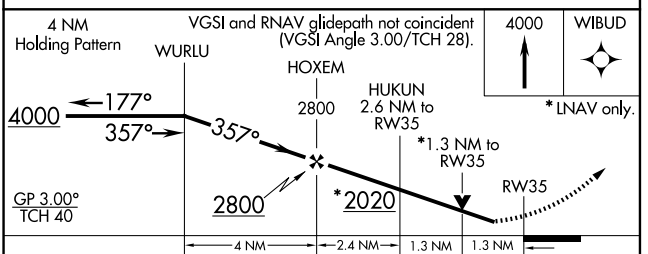


CATEGORY	A	B	C	D
LPV DA	1418-1	250 (300-1)	NA	
LNAV/VNAV DA	1654-1⅝	486 (500-1⅝)	NA	
LNAV MDA	1620-1	452 (500-1)	NA	
CIRCLING	1640-1	464 (500-1)	NA	

ELEV 1176 TDZE 1168

MIRL Rwy 17-35 L

REIL Rwys 17 and 35 L

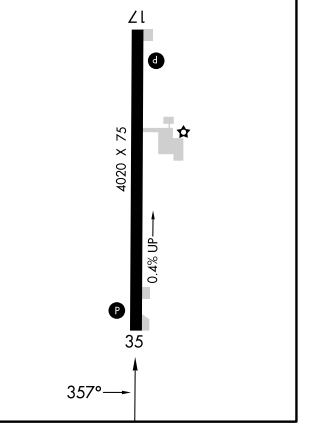

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026