RNAV (GPS) RWY 10

THOMSON/McDUFFIE COUNTY (HQU)


WAAS	APP CRS	Rwy Ldg	5215
CH 56521	097°	TDZE	467
W10A		Apt Elev	501


RNP APCH.

Baro-VNAV NA when using Daniel Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). When local altimeter setting not received, use Daniel Field altimeter setting: increase LPV DA to 917 feet and visibility ⅛ SM, increase LNAV/VNAV DA to 1028 feet; increase all MDAs 80 feet, and visibility LNAV Cats C/D ⅛ SM, and Circling Cat C ¼ SM, and Circling Cat D ½ SM.


MISSED APPROACH: Climb to 2500 direct PHINZ and hold.

AWOS-3	AUGUSTA APP CON ★	UNICOM
120.625	124.45 270.3	122.8 (CTAF) L

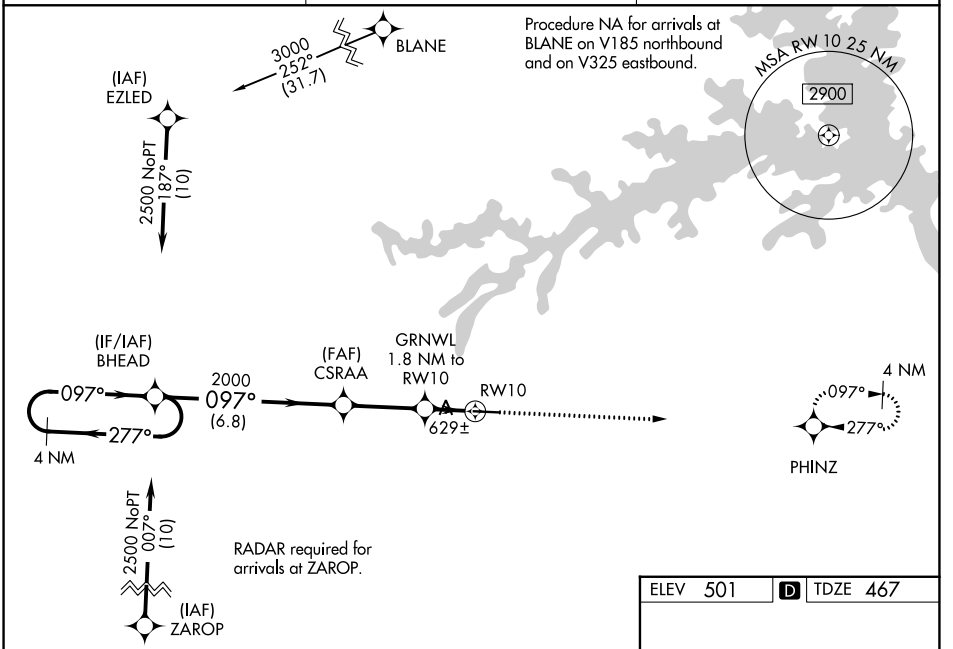

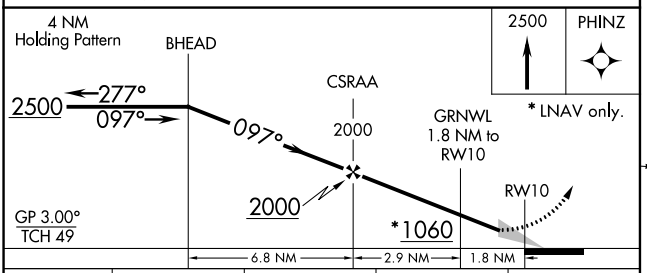

CATEGORY	A	B	C	D
LPV DA	850-1¼		383 (400-1¼)	
LNAV/VNAV DA	961-1⅝		494 (500-1⅝)	
LNAV MDA	880-1 413 (400-1)		880-1¼ 413 (400-1¼)	
CIRCLING	1060-1 559 (600-1)	1080-1 579 (600-1)	1160-1¾ 659 (700-1¾)	1240-2¼ 739 (800-2¼)

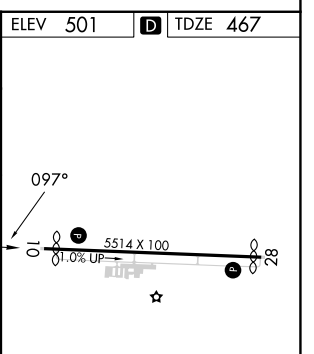

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026