RNAV (GPS) RWY 18

WEST WOODWARD (WWR)

WAAS CH 70614 W18A	APP CRS 176°	Rwy Ldg 6002 TDZE 2173 Apt Elev 2189


RNP APCH - GPS.

Baro-VNAV and VDP NA when using GAG altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Inop table does not apply. When local altimeter setting not received, use GAG altimeter setting and increase LPV DA to 2413 feet and LNAV/VNAV DA to 2478 feet; increase all MDAs 40 feet and Circling visibility Cat D ¼ SM.


ODALS

MISSED APPROACH: Climb to 5000 direct TISSY and hold.


AWOS-3	KANSAS CITY CENTER	UNICOM
118.425	126.95 379.2	122.8 (CTAF) L

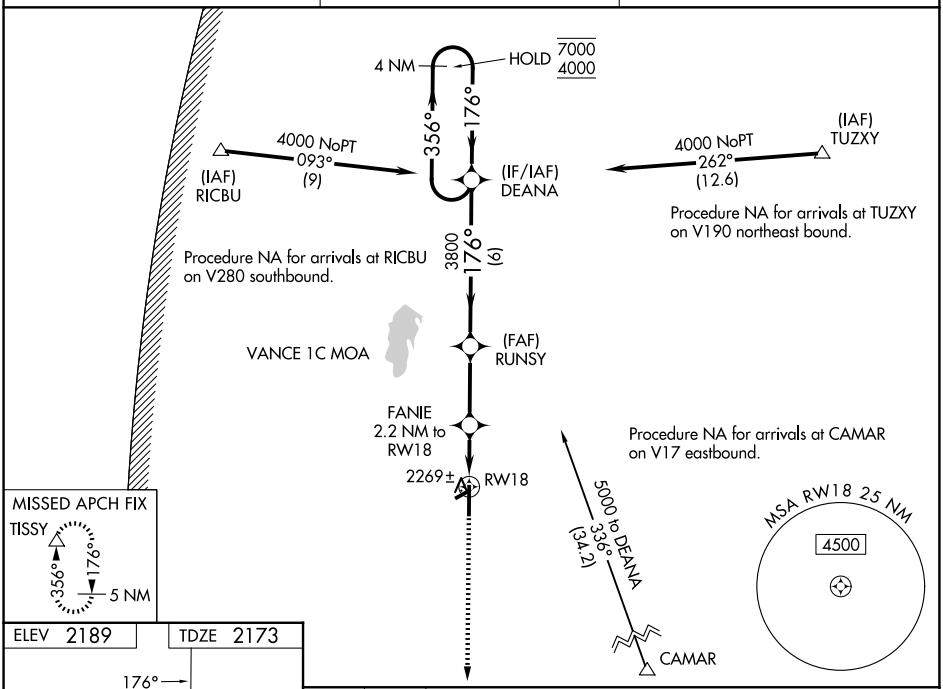

ELEV 2189	TDZE 2173

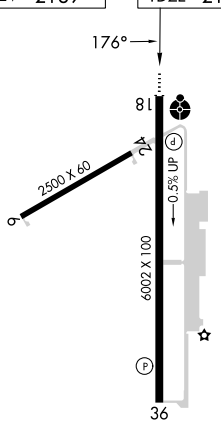

REIL Rwy 36 L
MIRL Rwy 6-24 and 18-36 L

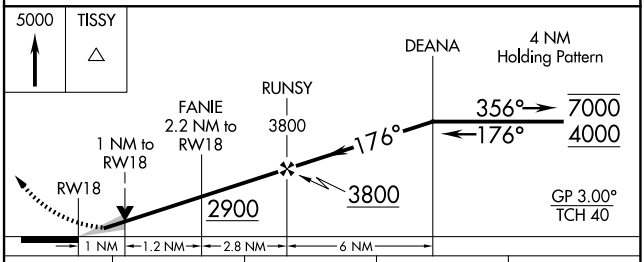

CATEGORY	A	B	C	D
LPV DA	2373-1	200 (200-1)		
LNAV/VNAV DA	2438-1	265 (300-1)		
LNAV MDA	2520-1	347 (400-1)		
CIRCLING	2660-1 471 (500-1)	2840-1 651 (700-1)	2940-2¼ 751 (800-2¼)	2960-2½ 771 (800-2½)

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026