| WAAS | APP CRS | Rwy Ldg | 6007 |
|---|---|---|---|
| CH 82199 | 233° | TDZE | 700 |
| W23A | | Apt Elev | 700 |


# RNAV (GPS) RWY 23

BESSEMER NTL(EKY)

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Alabaster altimeter setting and increase LPV DA to 1013 feet, LNAV/VNAV DA to 1211 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using Alabaster altimeter setting.

MISSED APPROACH: Climb to 4000 direct WUDGI and on track 148° to TASYU and hold, continue climb-in-hold to 4000.

| AWOS-3PT | BIRMINGHAM APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 118.825 | 124.9 351.85 | 123.75 | 123.0 (CTAF) L |

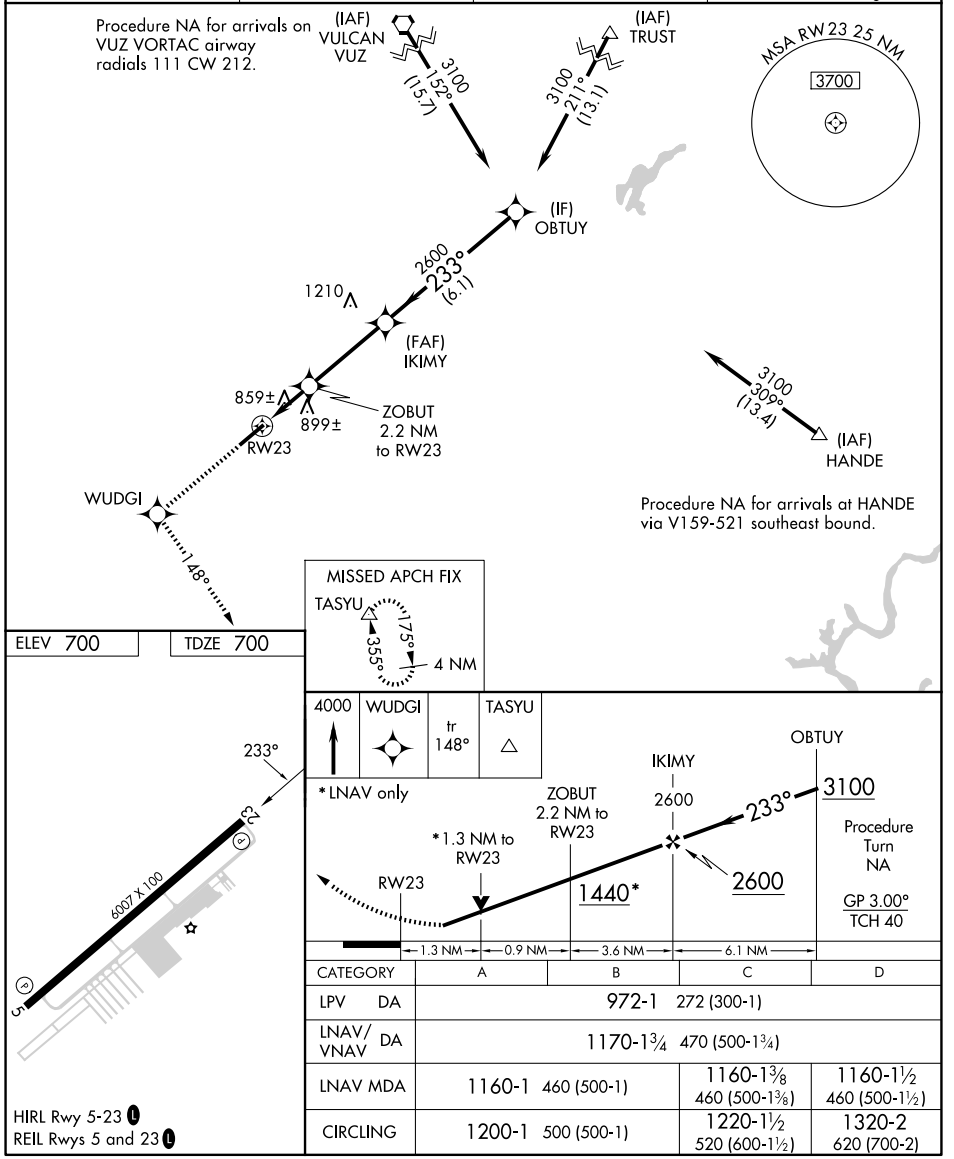


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 972-1 272 (300-1) | | | |
| LNAV/VNAV DA | 1170-1¾ 470 (500-1¾) | | | |
| LNAV MDA | 1160-1 460 (500-1) | | 1160-1⅜ 460 (500-1⅜) | 1160-1½ 460 (500-1½) |
| CIRCLING | 1200-1 500 (500-1) | | 1220-1½ 520 (600-1½) | 1320-2 620 (700-2) |



SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026