WAAS	APP CRS	Rwy Ldg 3401
CH 63138	136°	TDZE 754
W13A		Apt Elev 754

RNAV (GPS) RWY 13


WASHINGTON MUNI (AWG)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1066 feet, LNAV/VNAV DA to 1282 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct KILKE and hold.


AWOS-3	CHICAGO CENTER	UNICOM
127.825	135.6 370.95	122.7 (CTAF) L

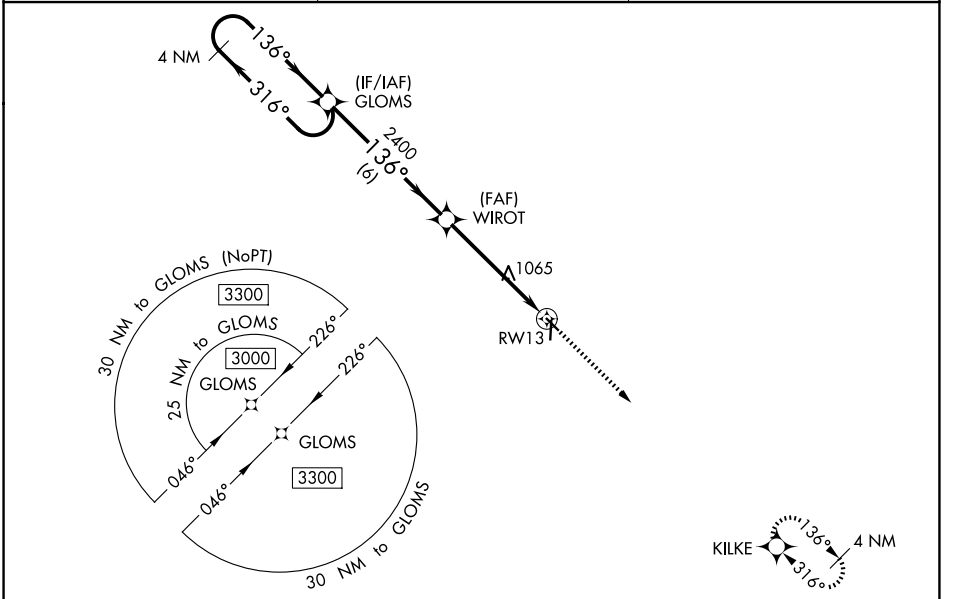

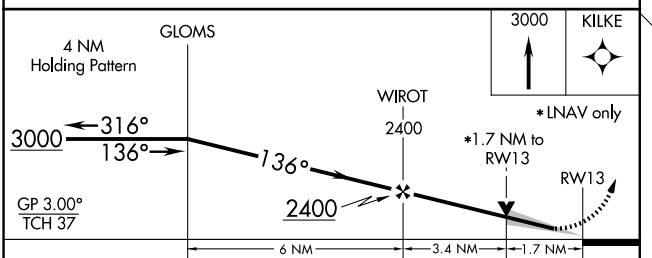

CATEGORY	A	B	C	D
LPV DA	1004-1 250 (300-1)			NA
LNAV/VNAV DA	1220-1⅝ 466 (500-1⅝)			NA
LNAV MDA	1320-1 566 (600-1)		1320-1⅝ 566 (600-1⅝)	NA
CIRCLING	1320-1 566 (600-1)		1500-2¼ 746 (800-2¼)	NA

ELEV 754 TDZE 754

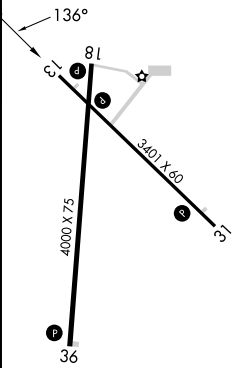

MIRL Rwys 13-31 and 18-36 L
REIL Rwys 13, 31, 18 and 36 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026