| WAAS | APP CRS | Rwy Ldg 3401 |
|---|---|---|
| CH 90538 | 316° | TDZE 754 |
| W31A | | Apt Elev 754 |


# RNAV (GPS) RWY 31
## WASHINGTON MUNI (AWG)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Rwy 31 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV and LNAV/VNAV DA to 1066 feet; increase all MDAs 80 feet and visibility LNAV Cat C ⅛ SM and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GLOMS and hold.


| AWOS-3 | CHICAGO CENTER | UNICOM |
|---|---|---|
| 127.825 | 135.6 370.95 | 122.7 (CTAF) L |

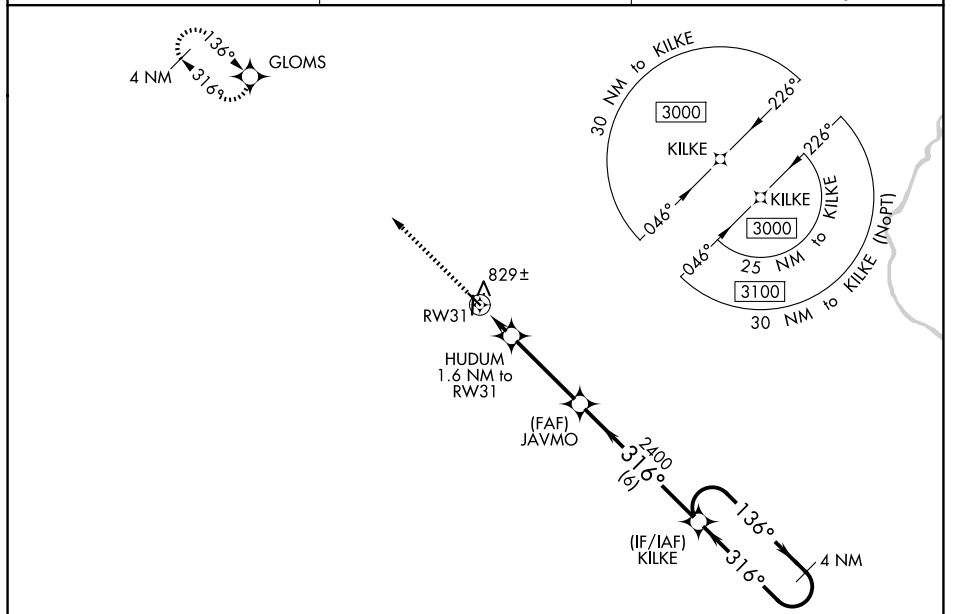


ELEV 754 TDZE 754




MIRL Rwys 13-31 and 18-36 L
REIL Rwys 13, 31, 18 and 36 L

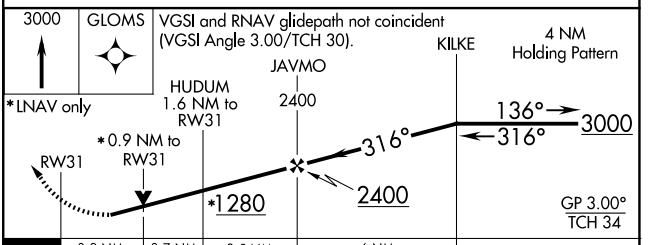


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1004-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1004-1 250 (300-1) | | | NA |
| LNAV MDA | 1080-1 326 (400-1) | | | NA |
| CIRCLING | 1200-1 446 (500-1) | 1260-1 506 (600-1) | 1500-2¼ 746 (800-2¼) | NA |



NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026