| WAAS CH **90416 W36A** | APP CRS **004°** | Rwy Ldg **4000** TDZE **752** Apt Elev **754** |
|---|---|---|


# RNAV (GPS) RWY 36
## WASHINGTON MUNI (AWG)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1064 feet and LNAV/VNAV DA to 1072 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GANAD and hold.

| AWOS-3 | CHICAGO CENTER | UNICOM |
|---|---|---|
| **127.825** | **135.6 370.95** | **122.7** (CTAF) L |

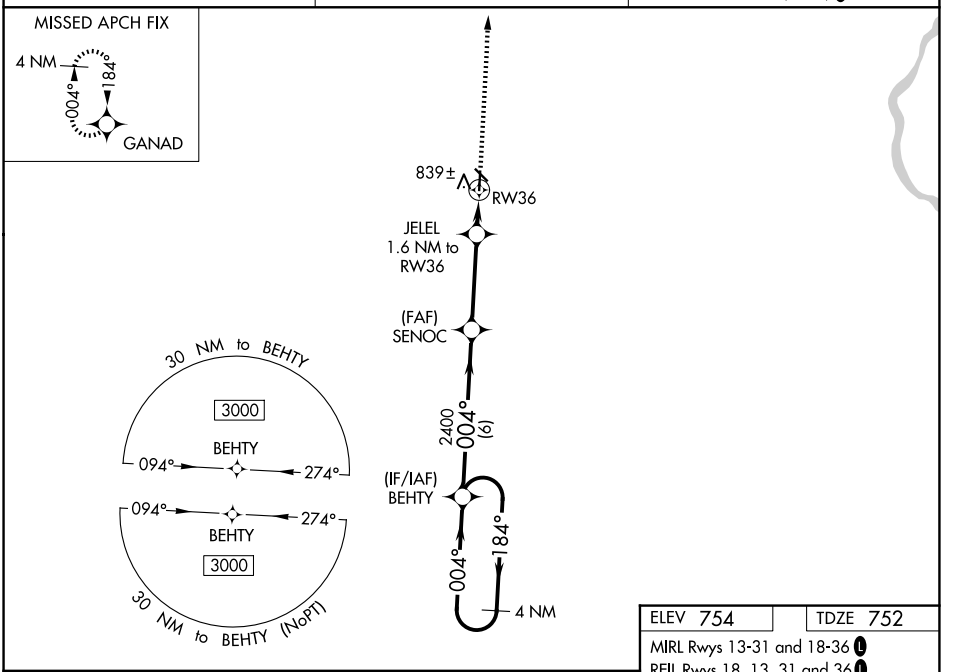


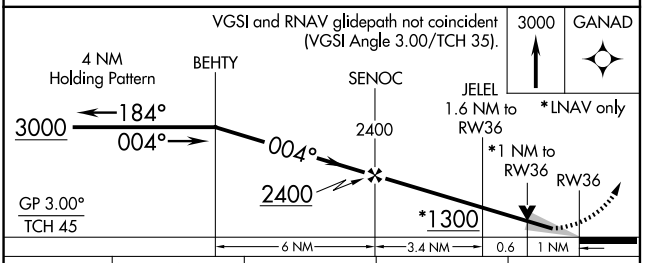
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1002-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1010-1 258 (300-1) | | | NA |
| LNAV MDA | 1100-1 348 (400-1) | | | NA |
| CIRCLING | 1200-1 446 (500-1) | 1260-1 506 (600-1) | 1500-2¼ 746 (800-2¼) | NA |

| ELEV 754 | TDZE 752 |
|---|---|

MIRL Rwys 13-31 and 18-36 L
REIL Rwys 18, 13, 31 and 36 L



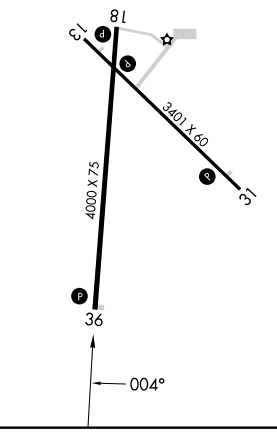


NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026