RNAV (GPS) RWY 25

FLEMING-MASON (FGX)


WAAS	APP CRS	Rwy Idg	4703
CH 69212	252°	TDZE	913
W25A		Apt Elev	913

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Blue Grass altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1240 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1290 feet and all visibilities ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ½ SM.


MISSED APPROACH: Climb to 3000 direct DIKRY and hold.


AWOS-3	INDIANAPOLIS CENTER	UNICOM
118.125	124.225 360.725	123.0 (CTAF) L

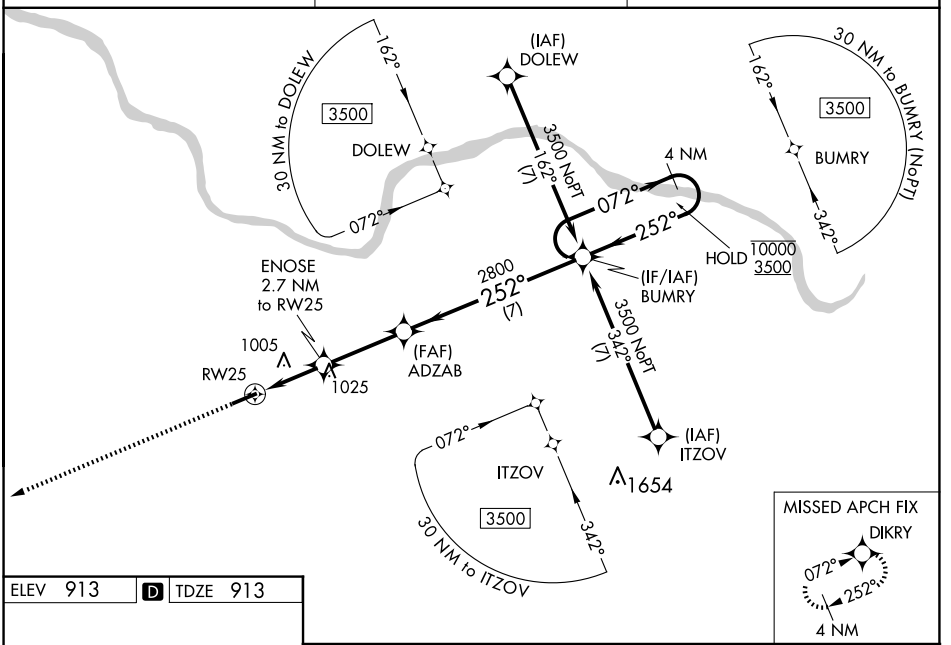

MISSED APCH FIX

ELEV 913 D TDZE 913



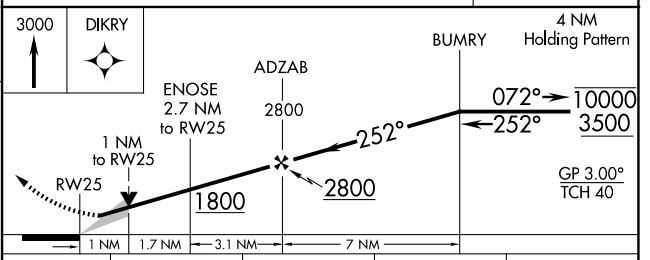

CATEGORY	A	B	C	D
LPV DA	1113-¾ 200 (200-¾)			
LNAV/VNAV DA	1163-¾ 250 (300-¾)			
LNAV MDA	1260-1 347 (400-1)			
CIRCLING	1320-1 407 (500-1)	1380-1 467 (500-1)	1520-1¾ 607 (700-1¾)	1520-2 607 (700-2)

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026