RNAV (GPS) RWY 7

FLEMING-MASON (FGX)


WAAS	APP CRS	Rwy Idg	4703
CH 56312	072°	TDZE	913
W07A		Apt Elev	913

RNP APCH - GPS.


Baro-VNAV and VDP NA when using Blue Grass altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1290 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1327 feet and all visibilities ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C/D ⅜ SM.


MISSED APPROACH: Climb to 3500 direct BUMRY and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
118.125	124.225 360.725	123.0 (CTAF) L

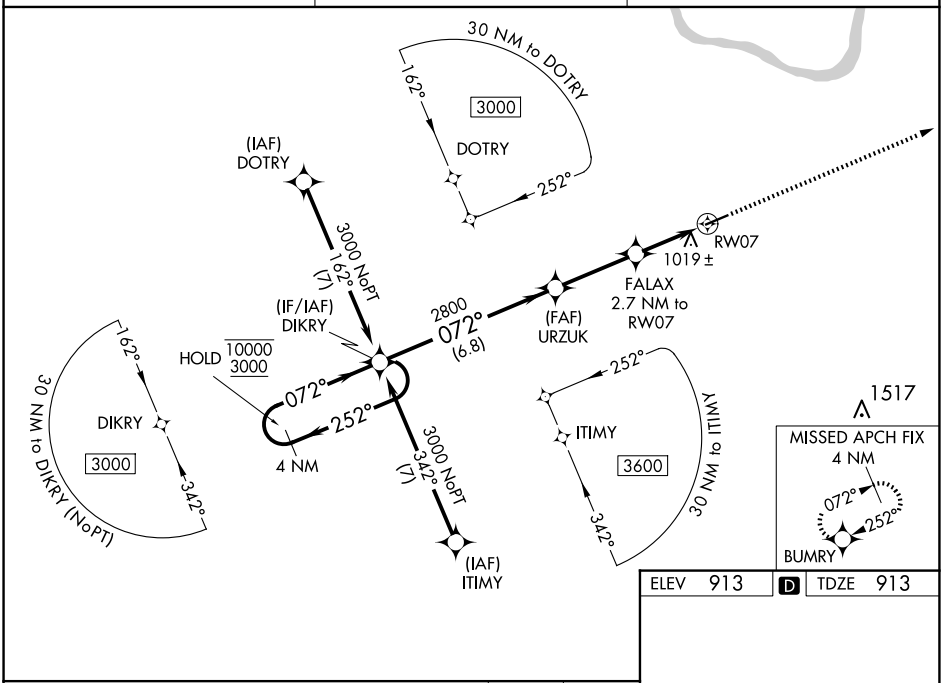

ELEV 913	D	TDZE 913

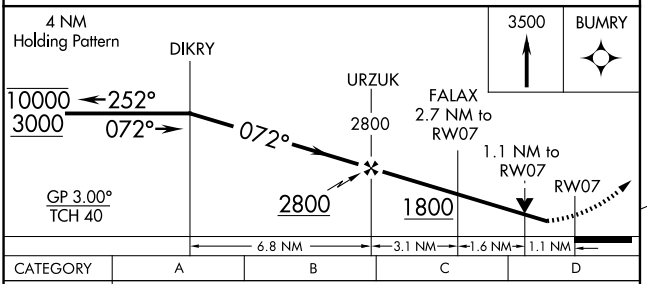



CATEGORY	A	B	C	D
LPV DA		1163-¾	250 (300-¾)	
LNAV/VNAV DA		1200-⅞	287 (300-⅞)	
LNAV MDA		1280-1	367 (400-1)	

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026