WAAS	APP CRS	Rwy Ldg	4012
CH 78215	134°	TDZE	837
W13A		Apt Elev	841

RNAV (GPS) RWY 13


OSKALOOSA MUNI (OOA)


RNP APCH - GPS.


When local altimeter setting not received, use OTM altimeter setting: increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1238 feet; increase all MDAs 20 feet. Baro-VNAV and VDP NA when using OTM altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct HONPA and hold.

AWOS-3	CHICAGO CENTER	UNICOM
118.625	118.15 335.575	122.8 (CTAF) L

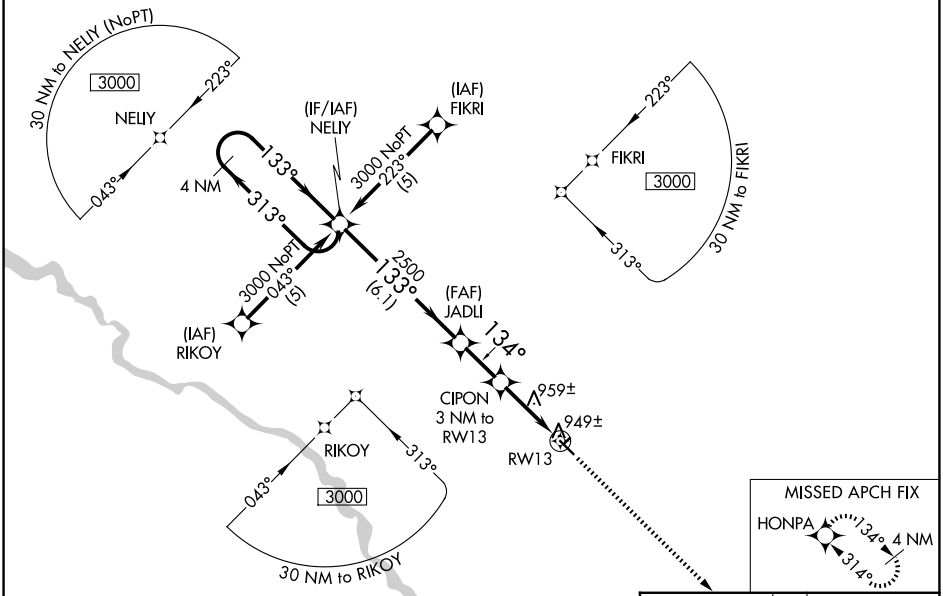

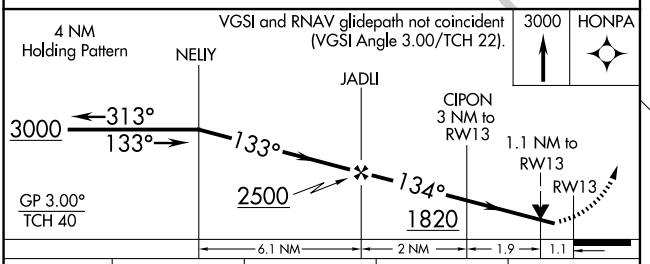



CATEGORY	A	B	C	D
LPV DA	1193-1¼ 356 (400-1¼)			NA
LNAV/VNAV DA	1219-1¼ 382 (400-1¼)			NA
LNAV MDA	1220-1 383 (400-1)		1220-1⅛ 383 (400-1⅛)	NA
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA

REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026