WAAS CH 82515 W31A	APP CRS 314°	Rwy Ldg 4012 TDZE 837 Apt Elev 841

RNAV (GPS) RWY 31


OSKALOOSA MUNI (OA)

RNP APCH.


When local altimeter setting not received, use Ottumwa altimeter setting and increase all DA 18 feet and all MDA 20 feet and increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Ottumwa altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3000 direct NELIY and hold.


AWOS-3	CHICAGO CENTER	UNICOM
118.625	118.15 335.575	122.8 (CTAF) L

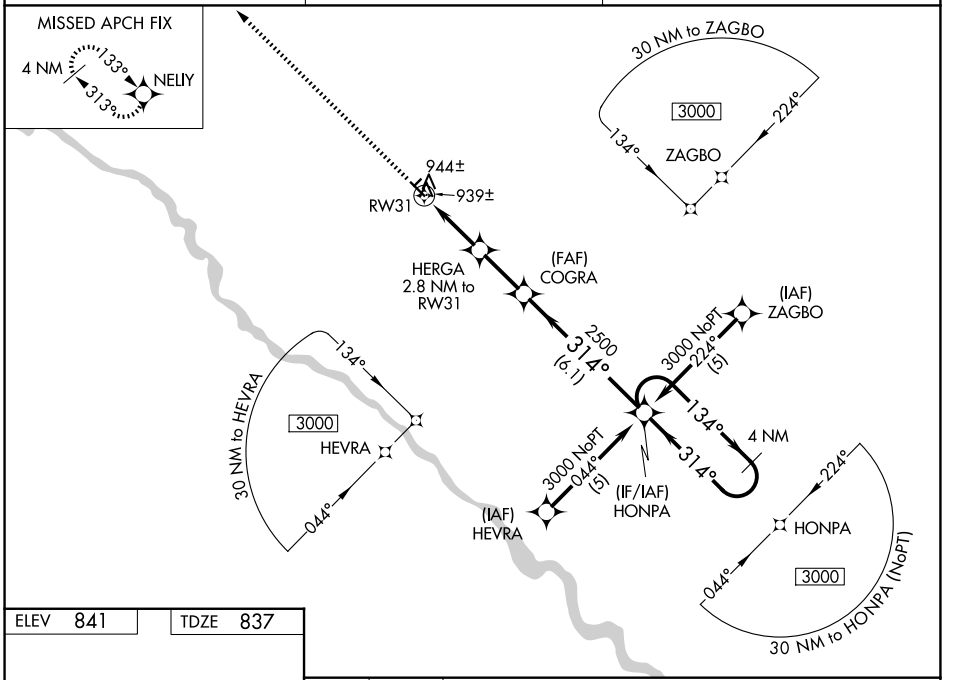

ELEV 841	TDZE 837



REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

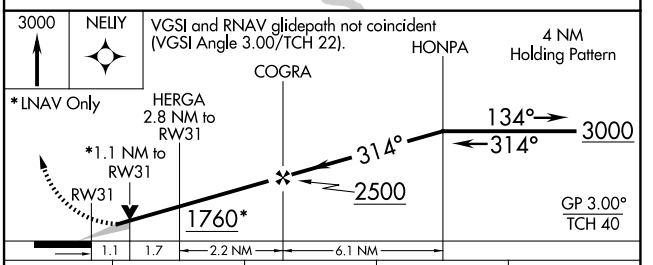

CATEGORY	A	B	C	D
LPV DA	1187-1¼ 350 (400-1¼)			NA
LNAV/VNAV DA	1209-1¼ 372 (400-1¼)			NA
LNAV MDA	1200-1 363 (400-1)			NA
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026