RNAV (GPS) RWY 11

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)


WAAS	APP CRS	Rwy Ldg	4876
CH 45722	110°	TDZE	854
W11A		Apt Elev	871


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅜ mile. Baro-VNAV NA when using Danville altimeter setting.


MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.

AWOS-3P	LOUISVILLE APP CON	UNICOM
119.725	132.075 327.0	122.8 (CTAF) L

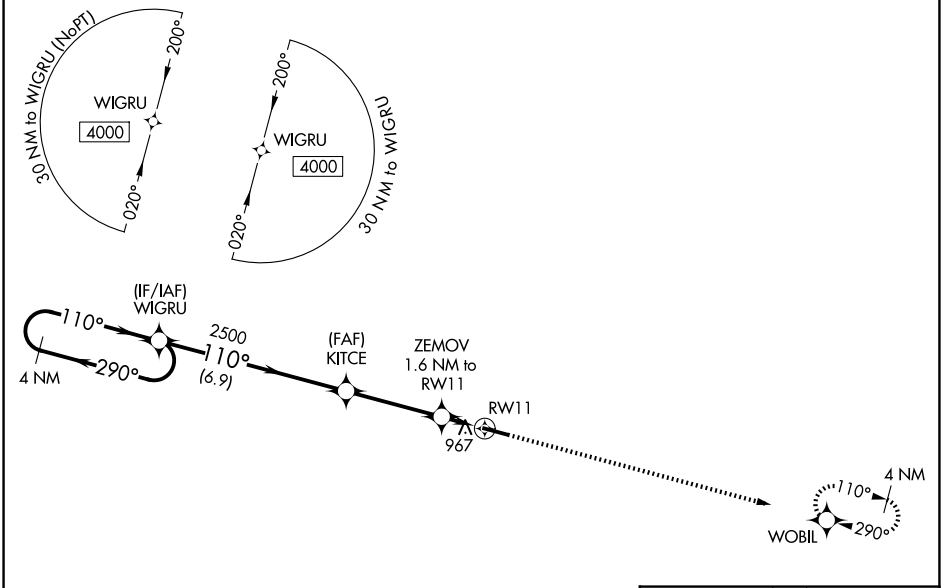

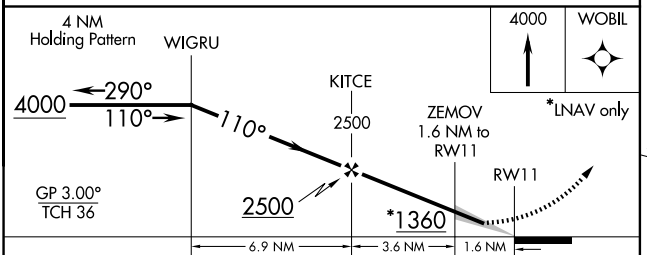

ELEV 871 TDZE 854



CATEGORY	A	B	C	D
LPV DA		1104-1	250 (300-1)	
LNAV/VNAV DA		1159-1⅛	305 (300-1⅛)	
LNAV MDA		1220-1	366 (400-1)	
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)

MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026