RNAV (GPS) RWY 29

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

WAAS CH 86422 W29A	APP CRS 290°	Rwy Ldg 4801 TDZE 870 Apt Elev 871

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 45°C (114°F). When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet; increase LPV all Cats and LNAV Cats C/D visibility ⅛ mile; LNAV/VNAV all Cats visibility ⅜ mile and Circling Cat D visibility ¼ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Danville altimeter setting.


MISSED APPROACH: Climb to 4000 direct WIGRU and hold.

AWOS-3P	LOUISVILLE APP CON	UNICOM
119.725	132.075 327.0	122.8 (CTAF) L


MISSED APCH FIX



ELEV 871 TDZE 870



MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

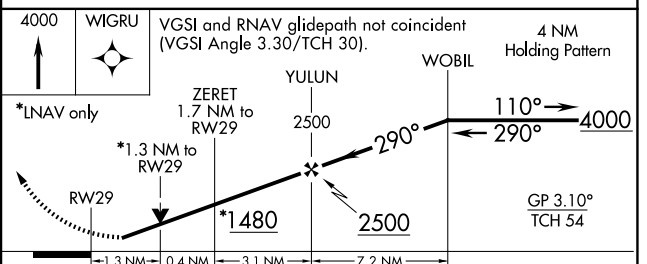

CATEGORY	A	B	C	D
LPV DA	1152-1		282 (300-1)	
LNAV/VNAV DA	1279-1¼		409 (500-1¼)	
LNAV MDA	1300-1	430 (500-1)	1300-1¼	430 (500-1¼)
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026