RNAV (GPS) RWY 17

WATONGA RGNL (JWG)


WAAS	APP CRS	Rwy Ldg	4001
CH 78047	173°	TDZE	1551
W17A		Apt Elev	1551


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CLK altimeter setting. When local altimeter setting not received, use CLK altimeter setting and increase LPV DA to 1887 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2086 feet and all visibilities ⅛ SM; increase all MDAs 100 feet and LNAV visibility Cat C ⅜ SM and Circling visibility Cat C ½ SM.


MISSED APPROACH: Climb to 2100 then climbing left turn to 4000 direct ASEHU and hold.

AWOS-3	VANCE APP CON ★	UNICOM
134.175	126.75 346.325	122.8 (CTAF) L

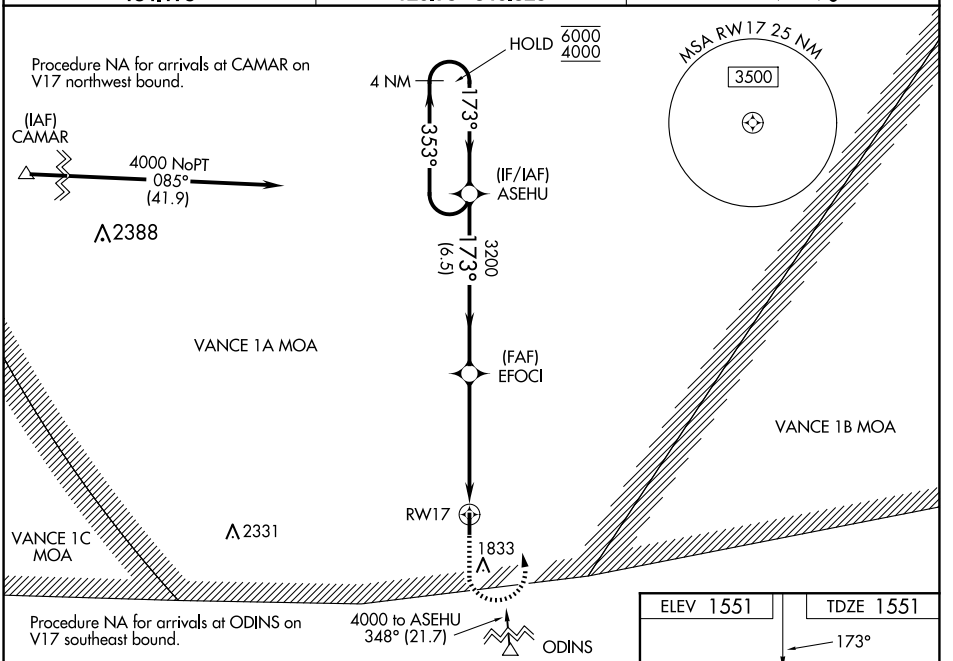

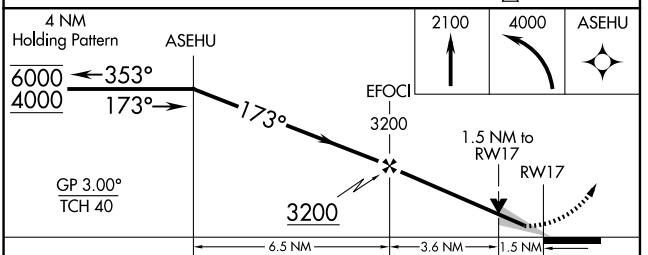

CATEGORY	A	B	C	D
LPV DA	1801-¾	250 (300-¾)		NA
LNAV/VNAV DA	2000-1⅜	449 (500-1⅜)		NA
LNAV MDA	2020-1	469 (500-1)	2020-1⅜ 469 (500-1⅜)	NA
CIRCLING	2040-1 489 (500-1)	2140-1 589 (600-1)	2140-1½ 589 (600-1½)	NA

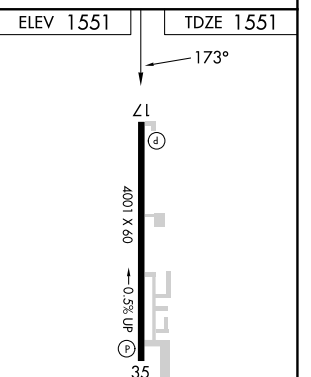

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026