WAAS CH 77622 W15A	APP CRS 148°	Rwy Ldg 4000 TDZE 1061 Apt Elev 1062

RNAV (GPS) RWY 15


HUTCHINSON MUNI/BUTLER FLD (HCD)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GYL altimeter setting. When local altimeter setting not received, use GYL altimeter setting and increase LPV DA to 1353 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1370 feet; increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 3000 direct WOBGI and hold.

AWOS-3	MINNEAPOLIS CENTER	GCO	UNICOM
118.525	127.1 290.2	121.725	122.8 (CTAF) L

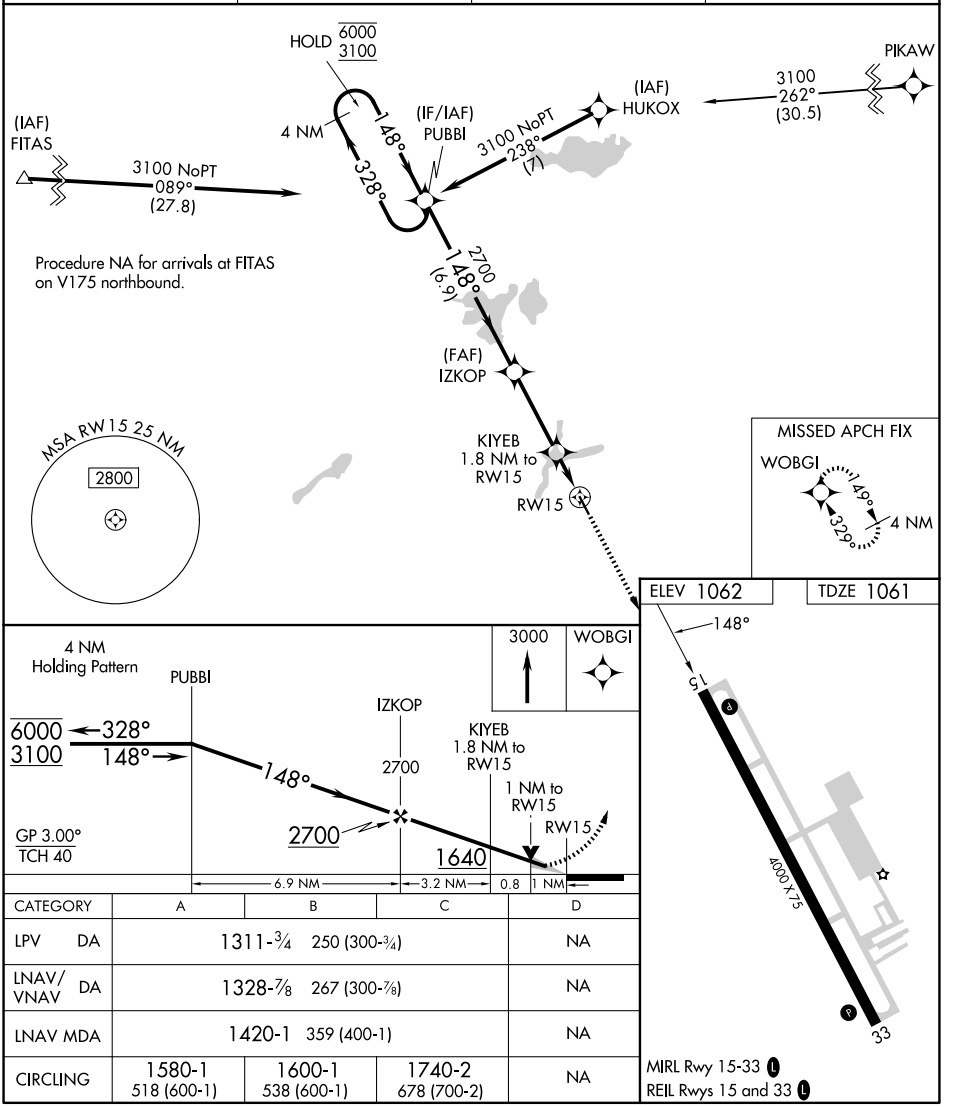

CATEGORY	A	B	C	D
LPV DA	1311-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1328-⅞ 267 (300-⅞)			NA
LNAV MDA	1420-1 359 (400-1)			NA
CIRCLING	1580-1 518 (600-1)	1600-1 538 (600-1)	1740-2 678 (700-2)	NA

MIRL Rwy 15-33 L
REIL Rwys 15 and 33 L

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026