# RNAV (GPS) RWY 13

GRENADA MUNI (GNF)

| WAAS CH 97328 W13A | APP CRS 131° | Rwy Ldg 7000 TDZE 208 Apt Elev 208 |
|---|---|---|


RNP APCH.


T A For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Baro-VNAV and VDP NA when using Greenwood altimeter setting. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1⅜ SM. When local altimeter setting not received, use Greenwood altimeter setting: Increase all DAs 65 feet; increase all MDAs 80 feet and visibility LNAV Cats C and D and Circling all Cats ¼ SM. For inop ALS when using Greenwood altimeter setting, increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1½ SM. Circling Rwy 4, 22 NA at night.

MALSR (A5)


MISSED APPROACH: Climb to 3000 direct ODPOF and hold.

| AWOS-3PT | MEMPHIS CENTER | UNICOM |
|---|---|---|
| 118.025 | 128.5 279.55 | 122.8 (CTAF) |

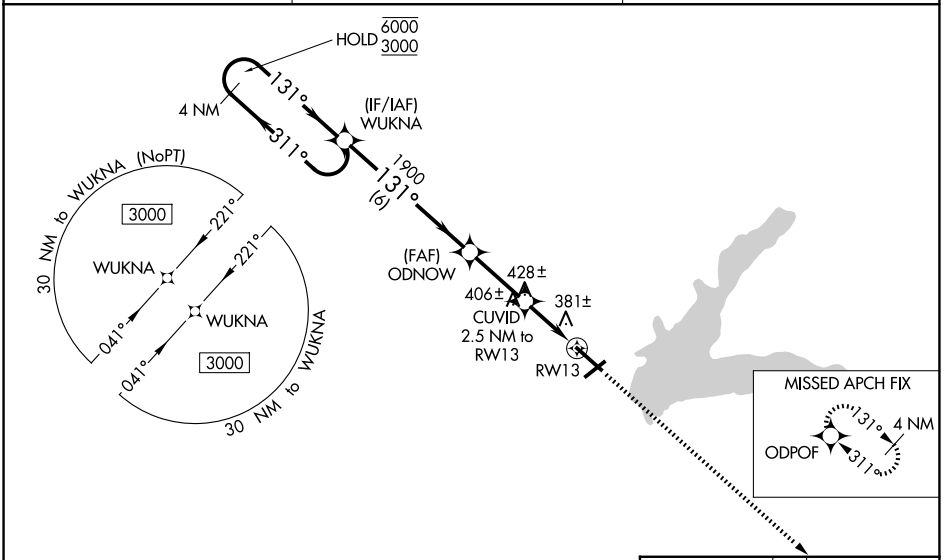

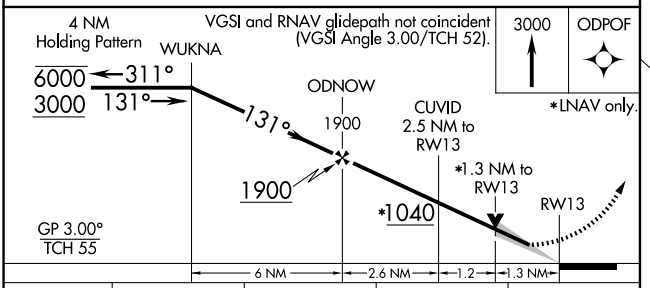
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 453-½ 245 (300-½) | | | |
| LNAV/VNAV DA | 666-1⅛ 458 (500-1⅛) | | | |
| LNAV MDA | 680-½ 472 (500-½) | | 680-1 472 (500-1) | |
| CIRCLING | 1000-1 792 (800-1) | | 1000-2¼ 792 (800-2¼) | 1060-2¾ 852 (900-2¾) |



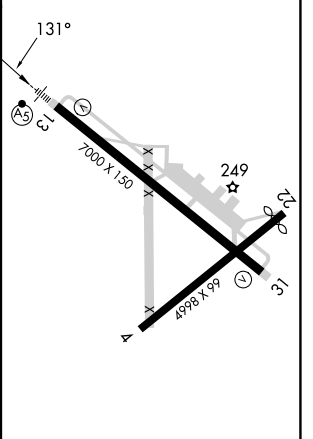


SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026