RNAV (GPS) RWY 32

LAC QUI PARLE COUNTY (DXX)

WAAS	APP CRS	Rwy Ldg	3300
CH 53530	317°	TDZE	1082
W32A		Apt Elev	1083

RNP APCH - GPS.

Baro-VNAV NA when using Appleton Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwys 9 and 27. When local altimeter setting not received, use Appleton Muni altimeter setting: increase LPV DA to 1329 feet; increase LNAV/VNAV DA to 1409 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C visibility ½ SM.


MISSED APPROACH: Climb to 3000 direct WERUL and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.975	128.5 306.2	122.8 (CTAF) L

MISSED APCH FIX




ELEV 1083 TDZE 1082

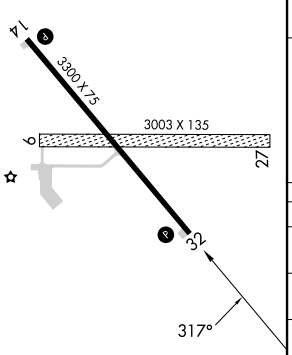

REIL Rwys 14 and 32 L

MIRL Rwy 14-32 L

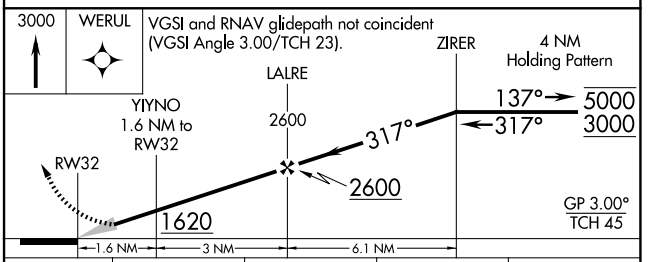

CATEGORY	A	B	C	D
LPV DA	1282-¾ 200 (200-¾)			NA
LNAV/VNAV DA	1363-⅞ 281 (300-⅞)			NA
LNAV MDA	1460-1 378 (400-1)		1460-1⅛ 378 (400-1⅛)	NA
CIRCLING	1640-1 557 (600-1)		1820-2 737 (800-2)	NA

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026