RNAV (GPS) RWY 2

AVI SUQUILLA (P2Ø)


WAAS	APP CRS	Rwy Ldg	6250
CH 72936	016°	TDZE	456
W02A		Apt Elev	458


RNP APCH - GPS.

V A NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Blythe altimeter setting. When local altimeter setting not received, use Blythe altimeter setting and increase LPV DA to 804 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1018 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat B/C ¼ SM, and Circling visibility Cat B ¼ SM.


MISSED APPROACH: (Do not exceed 180K until PKE VORTAC) Climb to 1100, then climbing left turn to 5600 direct PKE VORTAC and hold, continue climb-in-hold to 5600.

AWOS-3PT	LOS ANGELES CENTER	UNICOM
132.75	128.15 285.6	122.725 (CTAF) L

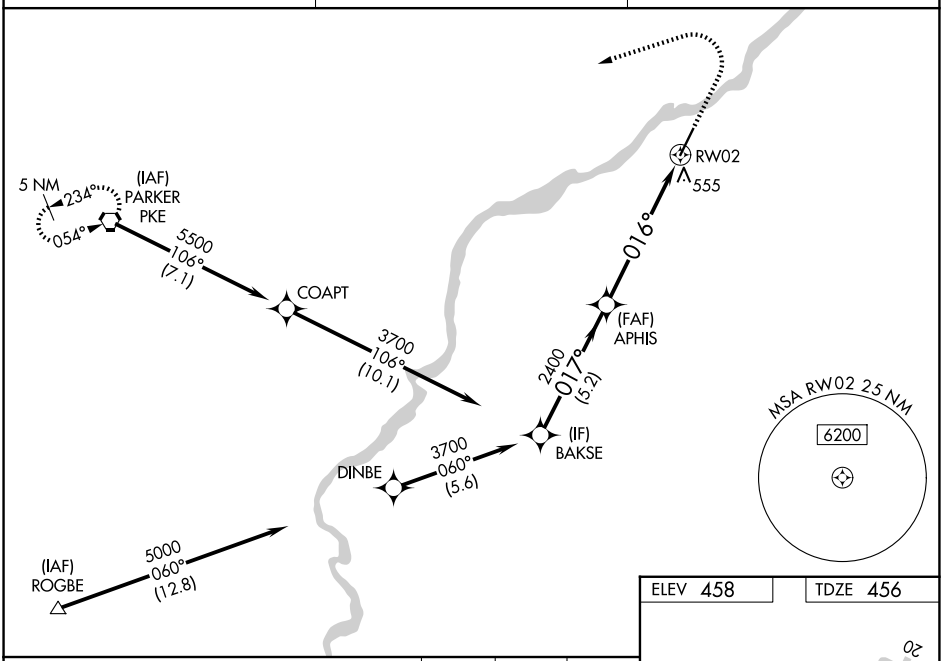

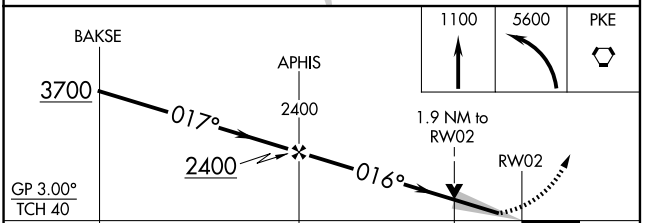

CATEGORY	A	B	C	D
LPV DA	706-¾ 250 (300-¾)			NA
LNAV/VNAV DA	920-1⅜ 464 (500-1⅜)			NA
LNAV MDA	1100-1 644 (700-1)		1100-3 644 (700-3)	NA
CIRCLING	1100-1 642 (700-1)		1580-3 1122 (1200-3)	NA

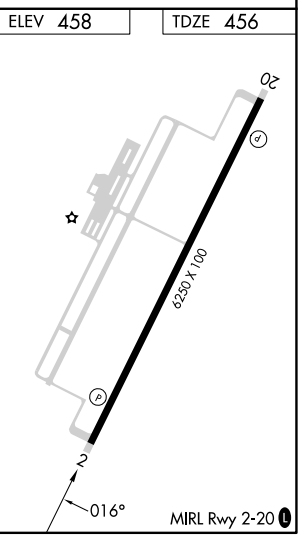

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026