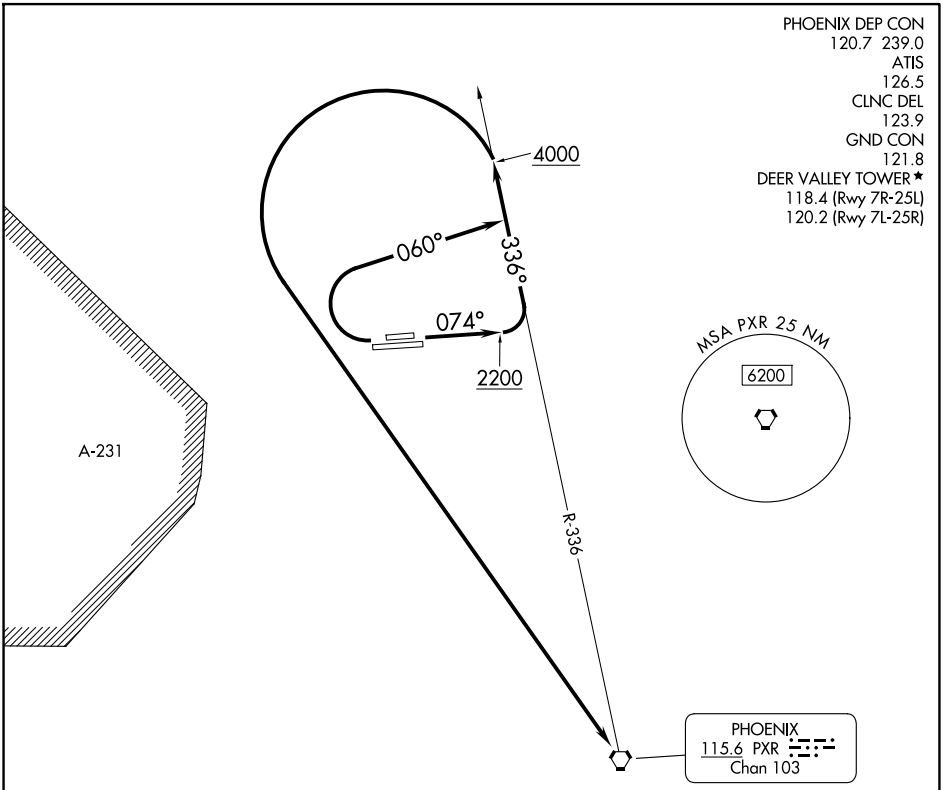


TAKEOFF MINIMUMS
Rwy 7L: Standard with minimum climb of 400′ per NM to 2200.
Rwy 7R: Standard with minimum climb of 675′ per NM to 1800.
Rwy 25L: Standard with minimum climb of 265′ per NM to 2600.
Rwy 25R: Standard with minimum climb of 285′ per NM to 2600.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb on heading 074° to 2200, then climbing left turn on PXR VORTAC R-336 northwest bound to 4000, thence. . . .

TAKEOFF RUNWAYS 25L/R: Climbing right turn on heading 060° and PXR VORTAC R-336 northwest bound to 4000, thence. . . .

. . . . left turn direct PXR VORTAC.

SW-4, 26 NOV 2026 to 24 DEC 2026