WAAS CH 90117 W25A	APP CRS 254°	Rwy Ldg 7281 TDZE 1475 Apt Elev 1478

RNAV (GPS) RWY 25L


PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS.


When VGSI inop, Circling to Rwy 25R NA at night. Circling NA north of Rwy 7R-25L at night. When local altimeter setting not received, use Scottsdale altimeter setting; increase LPV all Cats DA to 1877 feet and LPV all Cats visibility ⅛ SM. Increase all MDA 40 feet and Circling Cats B visibility ¼ SM. Rwy 25L helicopter visibility reduction below ¾ SM NA. VDP NA when using Scottsdale altimeter setting.


MISSED APPROACH: Climb to 6000 direct BOLES and on track 314° to HEVRO and right turn on track 072° to BANYO and hold.

ATIS	PHOENIX APP CON	DEER VALLEY TOWER ★	GND CON	UNICOM
126.5	120.7 239.0	118.4 (070°-250°) (CTAF) 120.2 (251°-069°)	121.8	122.95

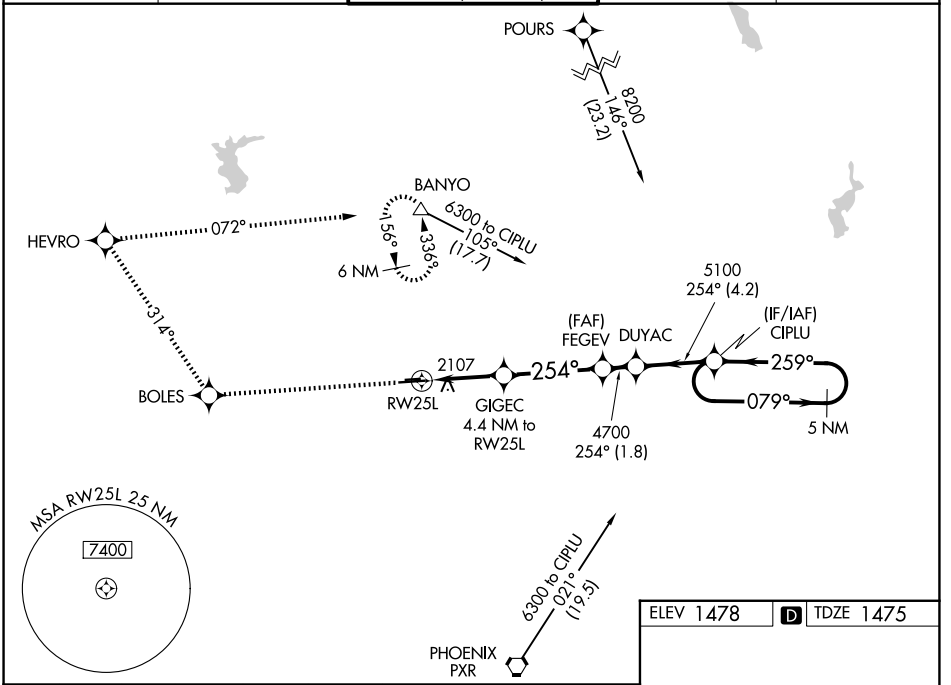

ELEV 1478 D TDZE 1475

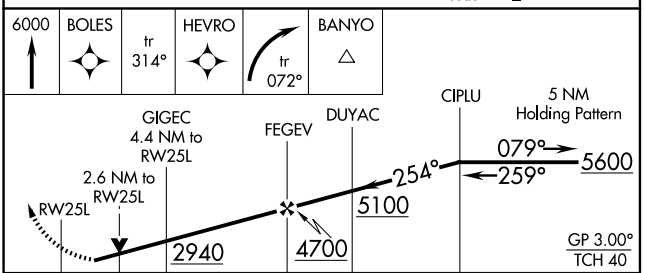



CATEGORY	A	B	C	D
LPV DA	1850-1¼ 375 (400-1¼)			
LNAV MDA	2360-1¼ 885 (900-1¼)		2360-2¾ 885 (900-2¾)	2360-3 885 (900-3)
CIRCLING	2400-1¼ 922 (1000-1¼)	2420-1¼ 942 (1000-1¼)	2580-3 1102 (1200-3)	2700-3 1222 (1300-3)

MIRL Rwys 7L-25R and 7R-25L
REIL Rwys 7L, 7R, 25L, and 25R

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026