WAAS	APP CRS	Rwy Ldg	7299
CH 72917	074°	TDZE	1460
W07A		Apt Elev	1478

RNAV (GPS) RWY 7R


PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS.


T A When VGSI inop, Circling Rwy 25R NA at night. When local altimeter setting not received, use Scottsdale altimeter setting: increase LPV DA to 1822 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 2160 feet and all visibilities ⅛ SM, increase all MDAs 40 feet and increase Circling Cat B visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro VNAV and VDP NA when using Scottsdale altimeter setting. Circling NA north of Rwy 7R-25L at night.


MISSED APPROACH: Climb to 5000 direct VIFPE and track 069° to AVENT and hold, continue climb-in-hold to 5000.

ATIS	PHOENIX APP CON	DEER VALLEY TOWER★	GND CON	UNICOM
126.5	120.7 239.0	118.4 (070°-250°) (CTAF) 120.2 (251°-069°)	121.8	122.95

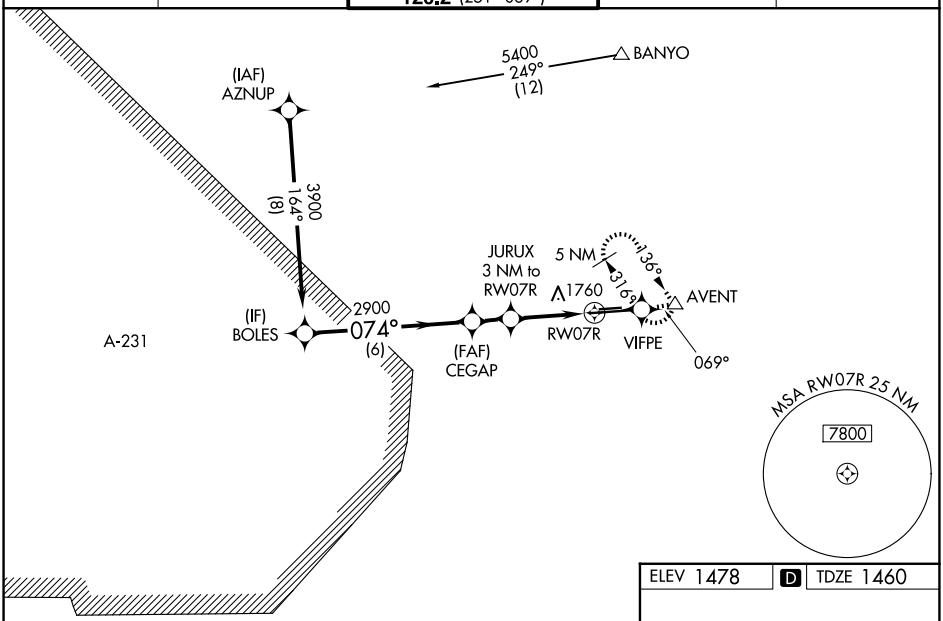

ELEV 1478 D TDZE 1460

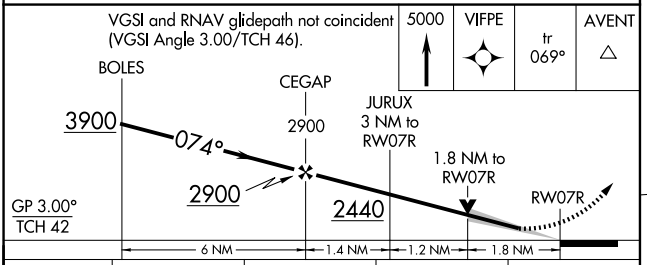



CATEGORY	A	B	C	D
LPV DA	1795-1⅛ 335 (400-1⅛)			
LNAV/VNAV DA	2133-2½ 673 (700-2½)			
LNAV MDA	2060-1 600 (600-1)		2060-1¾ 600 (600-1¾)	
CIRCLING	2400-1¼ 922 (1000-1¼)	2420-1¼ 942 (1000-1¼)	2580-3 1102 (1200-3)	2700-3 1222 (1300-3)

MIRL Rwys 7L-25R and 7R-25L
REIL Rwys 7L, 7R, 25L, and 25R

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026