RNAV (GPS) RWY 17

PERRY MUNI (F22)


WAAS	APP CRS	Rwy Ldg	5103
CH 72921	174°	TDZE	994
W17A		Apt Elev	1002

RNP APCH.

Baro-VNAV NA when using KPNC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When VGSI inop, procedure NA at night. Rwy 17 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet, all MDA 60 feet and increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct HIGIY and on track 192° to YUPUD and hold.

KANSAS CITY CENTER	UNICOM
127.8 319.1	122.8 (CTAF) L

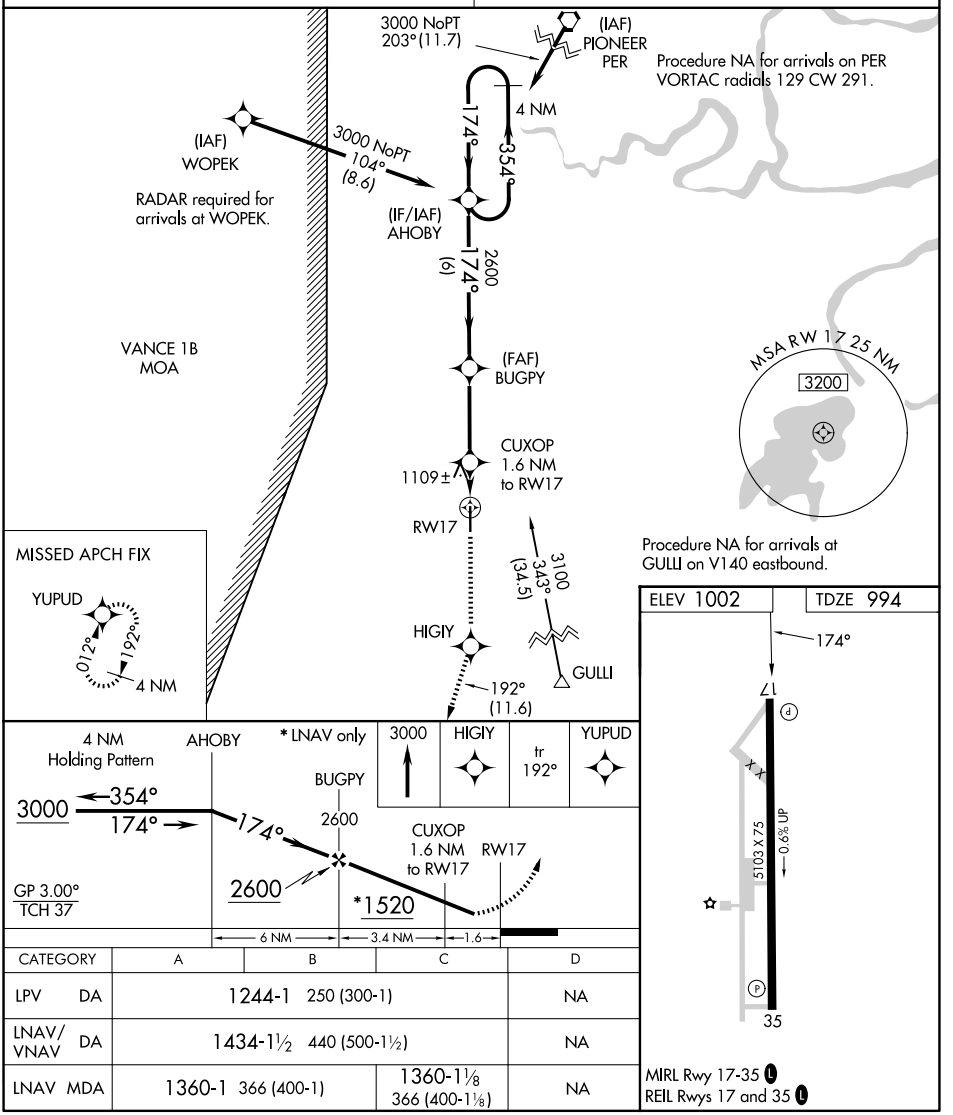

CATEGORY	A	B	C	D
LPV DA	1244-1 250 (300-1)			NA
LNAV/VNAV DA	1434-1½ 440 (500-1½)			NA
LNAV MDA	1360-1 366 (400-1)		1360-1⅛ 366 (400-1⅛)	NA

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026