WAAS	APP CRS	Rwy Idg	4201
CH 70618	127°	TDZE	1402
W13A		Apt Elev	1402

RNAV (GPS) RWY 13


BARNES COUNTY MUNI (BAC)


RNP APCH - GPS.


Baro-VNAV NA when using Jamestown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Jamestown altimeter setting: increase LPV DA to 1729 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1966 and all visibilities ¼ SM; increase all MDA 80 feet and visibility LNAV Cat C and Circling Cat C ¼ SM. Circling NA to Rwys 5, 8, 17, 23, 26 and 35. Rwy 13 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3100 direct PIBBS and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.725	124.2 270.3	122.8 (CTAF) L

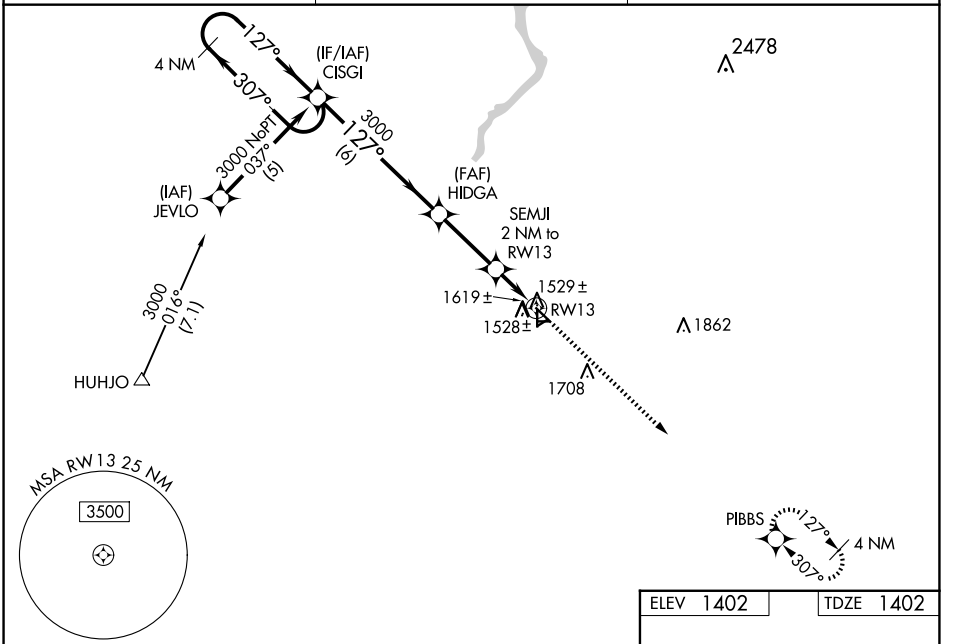

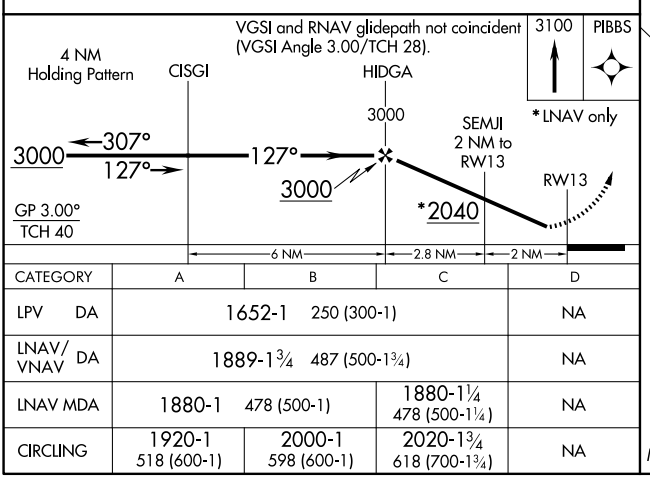

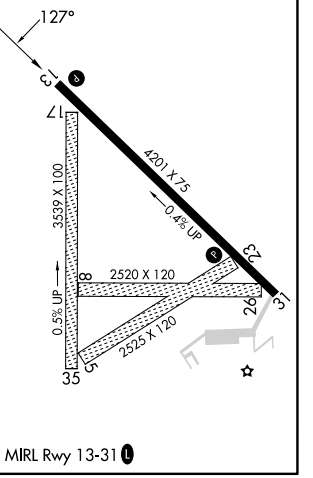

CATEGORY	A	B	C	D
LPV DA	1652-1 250 (300-1)			NA
LNAV/VNAV DA	1889-1¾ 487 (500-1¾)			NA
LNAV MDA	1880-1 478 (500-1)		1880-1¼ 478 (500-1¼)	NA
CIRCLING	1920-1 518 (600-1)	2000-1 598 (600-1)	2020-1¾ 618 (700-1¾)	NA

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026