WAAS CH 49138 W09A	APP CRS 089°	Rwy Ldg 4043 TDZE 1243 Apt Elev 1243

RNAV (GPS) RWY 9


CUMBERLAND MUNI (UBE)


RNP APCH - GPS.

T A Baro-VNAV NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. VDP NA when using Rice Lake altimeter setting. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1536 feet and LNAV/VNAV DA to 1562 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ⅛ mile and increase LNAV Cat C/D visibility and Circling Cat C/D visibility ¼ mile. Circling Rwy 18, 36 NA at night.

MISSED APPROACH: Climb to 3400 direct BURPS and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GCO	UNICOM
119.175	125.3 335.6	121.725	122.8 (CTAF) L

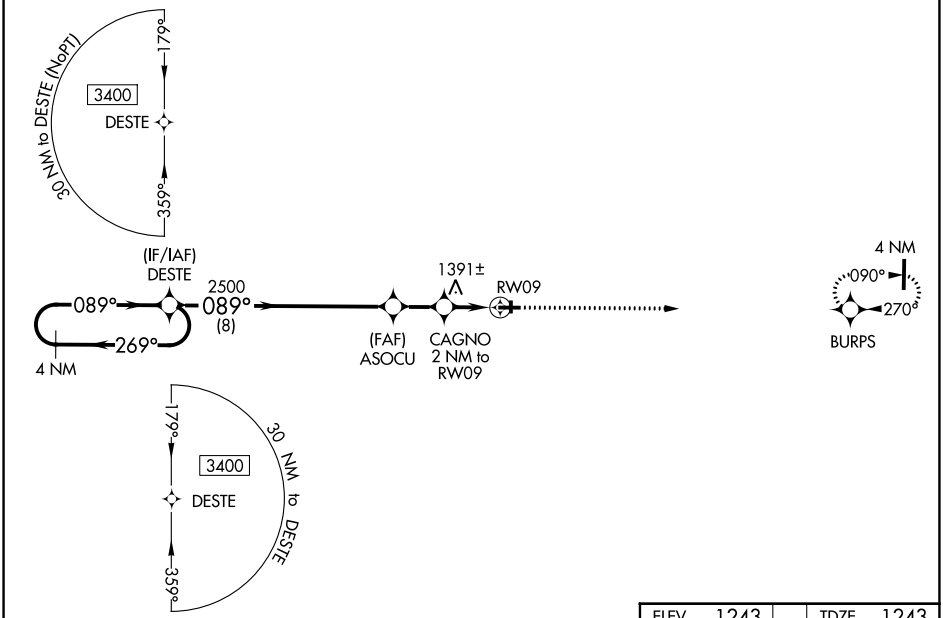

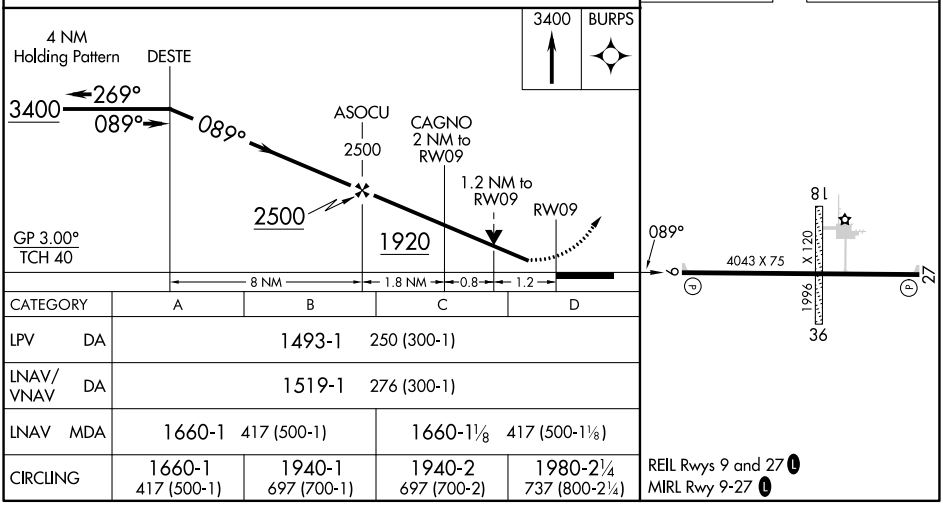

CATEGORY	A	B	C	D
LPV DA	1493-1 250 (300-1)			
LNAV/VNAV DA	1519-1 276 (300-1)			
LNAV MDA	1660-1 417 (500-1)		1660-1⅛ 417 (500-1⅛)	
CIRCLING	1660-1 417 (500-1)	1940-1 697 (700-1)	1940-2 697 (700-2)	1980-2¼ 737 (800-2¼)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

EC-3, 26 NOV 2026 to 24 DEC 2026
EC-3, 26 NOV 2026 to 24 DEC 2026