
LONE STAR DEP CON
118.1 306.95
ATIS
126.925
CLNC DEL
128.725
GND CON
132.65 306.2
ALLIANCE TOWER
135.15 257.9

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

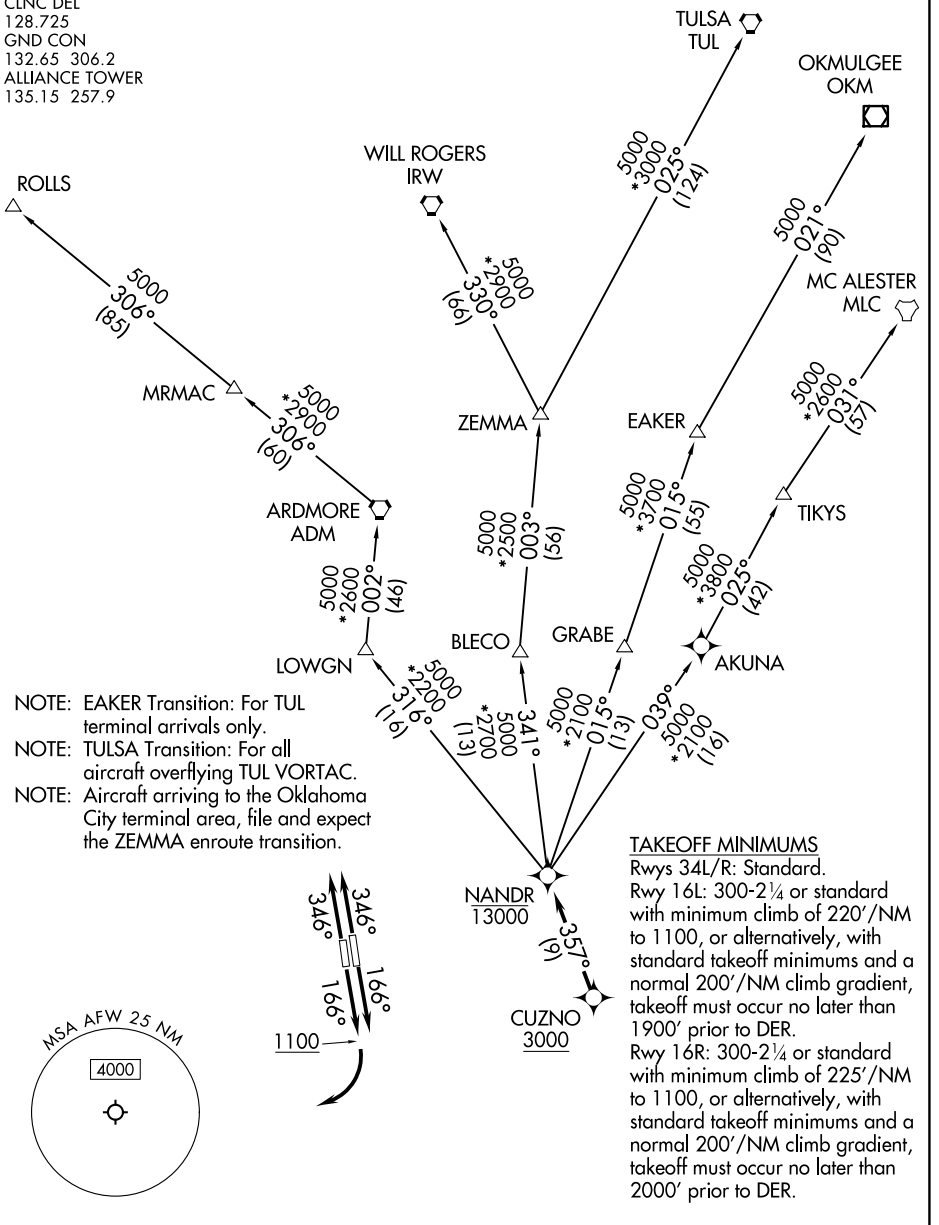

NOTE: EAKER Transition: For TUL terminal arrivals only.
NOTE: TULSA Transition: For all aircraft overflying TUL VORTAC.
NOTE: Aircraft arriving to the Oklahoma City terminal area, file and expect the ZEMMA enroute transition.

TAKEOFF MINIMUMS
Rwys 34L/R: Standard.
Rwy 16L: 300-2¼ or standard with minimum climb of 220′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1900′ prior to DER.
Rwy 16R: 300-2¼ or standard with minimum climb of 225′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 2000′ prior to DER.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026