# RNAV (GPS) RWY 31

BAKER MUNI (BHK)


| WAAS | APP CRS | Rwy Ldg | 5904 |
|---|---|---|---|
| CH 50138 | 309° | TDZE | 2981 |
| W31A | | Apt Elev | 2981 |

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 54°C. Baro-VNAV and VDP NA when using BWW altimeter setting. When local altimeter setting not received, use BWW altimeter setting and increase LPV DA to 3332 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 3368 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cats C/D ¼ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 6000 direct KIXCO and hold.

| ASOS | SALT LAKE CENTER | CTAF |
|---|---|---|
| 135.475 | 126.85 305.2 | 122.9 (L) |

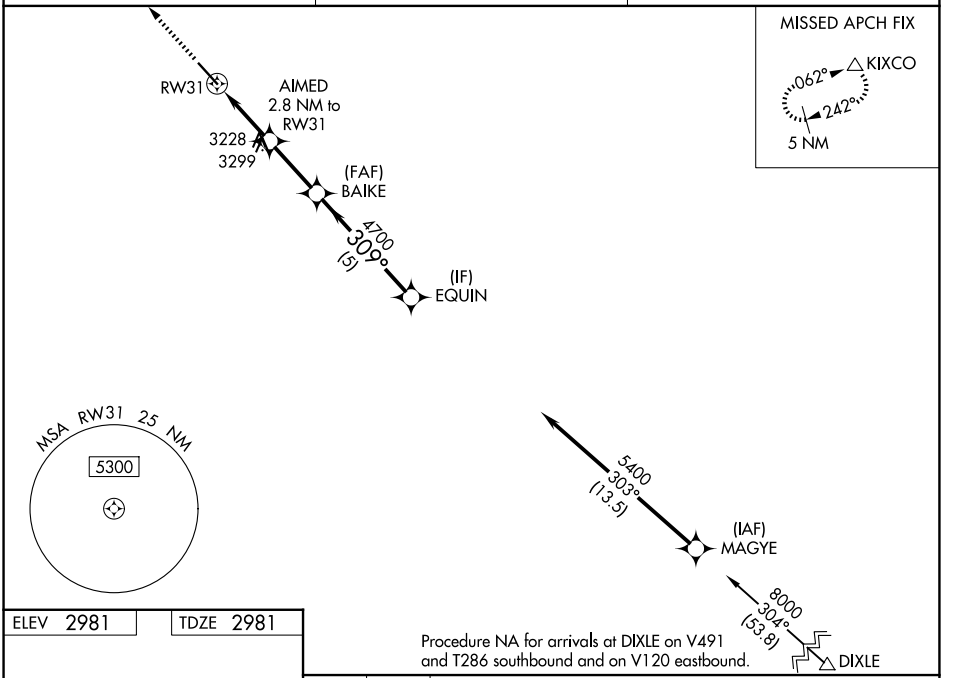



Procedure NA for arrivals at DIXLE on V491 and T286 southbound and on V120 eastbound.




ELEV 2981 TDZE 2981

MIRL Rwy 13-31 (L)
REIL Rwys 13 and 31 (L)

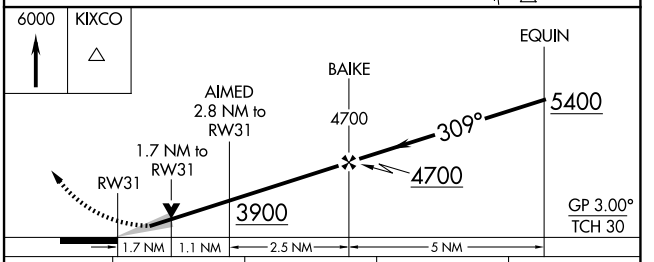


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 3231-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 3267-⅞ 286 (300-⅞) | | | |
| LNAV MDA | 3540-1 559 (600-1) | | 3540-1⅝ 559 (600-1⅝) | |
| CIRCLING | 3540-1 559 (600-1) | | 3620-1¾ 639 (700-1¾) | 3820-2¾ 839 (900-2¾) |



NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026