WAAS	APP CRS	Rwy Idg	4589
CH 99425	229°	TDZE	45
W23A		Apt Elev	45


RNAV (GPS) RWY 23

NUIQSUT (AQT) (PAQT)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV NA with Deadhorse altimeter setting. When local altimeter setting not received, use Deadhorse altimeter setting and increase all DA 123 feet and all MDA 140 feet, increase LPV all Cats and LNAV Circling Cat C visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cat C visibility ½ mile.

MISSED APPROACH: Climb to 1700 direct BIQFI and hold.


ASOS	ANCHORAGE CENTER	DEADHORSE RADIO	CTAF
135.35	119.4	122.5	122.8 L

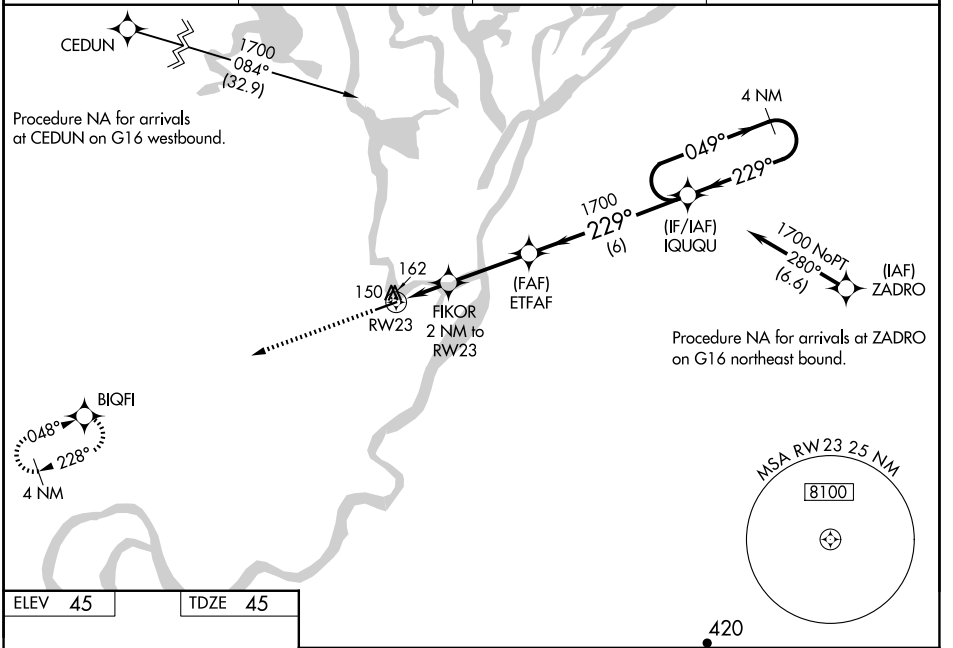

ELEV 45 TDZE 45



MIRL Rwy 5-23 L
REIL Rwy 23 L

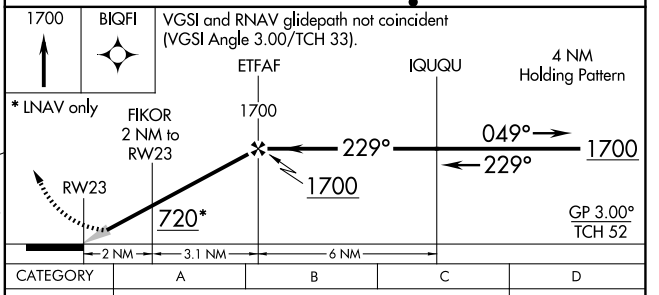

CATEGORY	A	B	C	D
LPV DA	295-1 250 (300-1)			NA
LNAV/VNAV DA	369-1 324 (400-1)			NA
LNAV MDA	480-1 435 (500-1)		480-1⅜ 435 (500-1⅜)	NA
CIRCLING	520-1 475 (500-1)		520-1½ 475 (500-1½)	NA

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026